

产品画册 工业脚轮 5.0
CATALOG -Industrial Casters





Company Profile

Guangzhou MIYA Metal Products Co., Ltd. is a manufacturer specializing in the production of casters. Office is located in Guangzhou and the factory is located in Yangjiang(casters) and Zhejiang(hand carts). MIYA METAL is a professional casters and relevant accessories manufacturing group company composed of hardware factory and injection molding factory. The factory has its own abrasive tools and equipment, specialized in the production and design of: heavy duty industrial casters (polyurethane aluminum core casters, polyurethane iron core casters, solid polyurethane casters, rubber mould aluminum core casters, leveling casters, nylon casters, high-temperature casters and scaffold casters, etc.), Light and medium duty casters (Cladding casters, central control casters, medical mute single wheels, medical mute double wheels, shopping casters, elevator casters, etc.), hand carts, leveling feet, floor locks, bearings and other caster related accessories and products. Professional for all kinds of carts, beds, tables, equipment, medical devices to create the famous brand in the caster industry.

The casters produced have the characteristics of wear resistance, low noise, corrosion resistance, impact resistance, flexible rotation, accurate rotation track, strong bearing capacity, fashionable style and strong practicability. The products are divided into three categories: general purpose, precision and special purpose. There are more than 20 series and more than 2000 models, which are widely used in trolley, mechanical equipment, medical equipment and other fields. Each key part of the casters produced has been tested by various scientific tests, including weight resistance test, running endurance test, wheel rotation performance test and rotation performance test. At present, the service network has spread all over the country and more than 20 countries and regions such as Europe, America and Southeast Asia. At the same time, we can also customize various casters for customers.

Our developers closely follow the needs of the market and use scientific production technology to develop environmentally friendly, durable and beautiful casters products. Our production and sales team is well-trained, United and efficient. "Quality first, service first" is our core concept.

The pursuit of excellent quality and honest hospitality is our business purpose. We know that MIYA 's development originates from the trust and support of every customer. In the coming days, we will continue to strengthen our technical force, improve our management level and make the company develop and grow. At the same time, we hope to create greater value for our customers at a newer and higher level through more considerate and high-quality services.

Commitment: to meet customer needs with high-quality products and the fastest and best service.

Powerful Factory

Optimized raw materials, sophisticated manufacturing process and standardized production mode are only for producing good products



The raw materials

High quality raw material


Select high-quality raw material suppliers to ensure product quality



Production

Standard automatic production

Efficient automatic+semi-automatic production to greatly improves efficiency

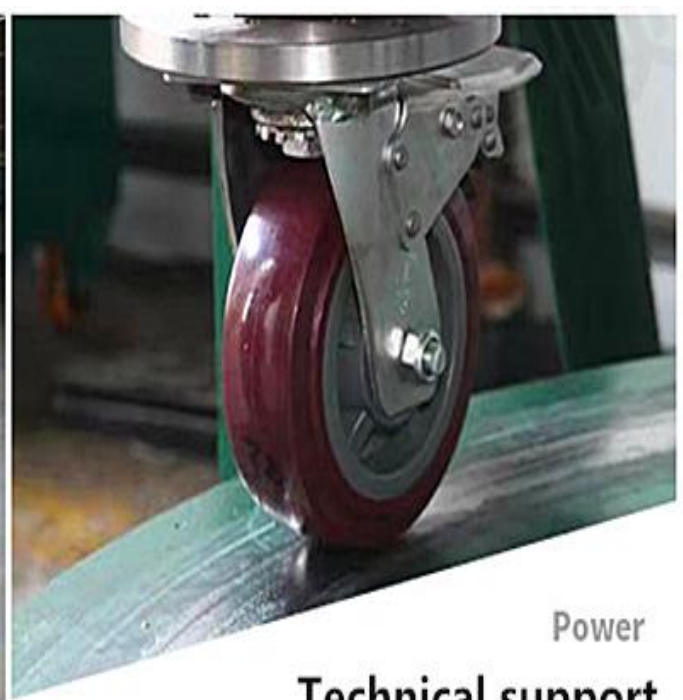

Power
Technical support

Professional technical team to meet customers' high customized requirements



INVENTORY

Factory inventory

Standard and orderly shipping mode provides customers with more efficient purchasing mode



Packing & Delivery

Cooperated Brands



HOW TO SELECT A CASTOR FOR YOUR REQUIREMENTS

Castors are used to reduce labor intensity and improve movement efficiency. How to select the caster according to your usage, environment and requirement

01 Load Capacity/wheel and Caster Types

In order to determine the required load capacity of a wheel or caster, the dead weight of transport unit, the maximum additional load and number of wheels and casters to be used must be known. By using four or more wheels or casters can vary.

The required load capacity can be defined as follows:

$$T = \frac{E+Z}{n} \times S$$

T=Required load capacity of the wheel or caster


E=Dead weight of the transport unit

Z=Maximum additional load



n=Number of wheels or casters used

S=Safety factor

Efficient load caster quantity(M) as follows:

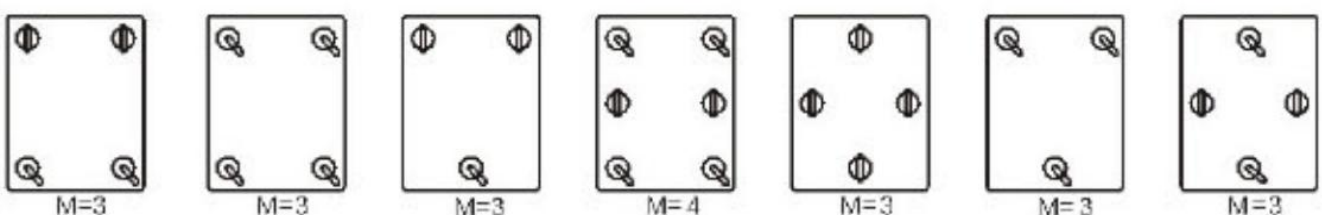

Please consider the caster load maximum stress point when you choose the load capacity. In the situation as below. P1 is the maximum stress point.

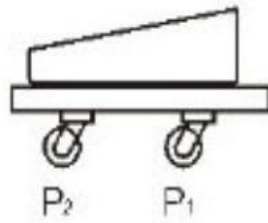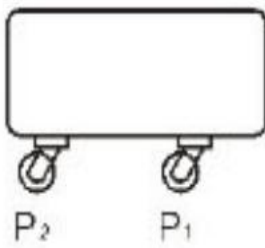

The safety factor S reflects the deviation from the standard application conditions (even floor, walking speed, load must act equally on all wheels or casters, straight travelling, ambient temperatures between 15°C and 30°C). The safety factor is influenced by the speed and the ratio between wheel ϕ and height of the obstacles. A distinction is drawn between four categories:

1. Indoor manual transport (height of the obstacles $< 5\%$ of the wheel ϕ): Safety factor: 1.0 to 1.5
2. Outdoor manual transport (height of the obstacles $< 5\%$ of the wheel ϕ): Safety factor: 1.5 to 2.2
3. Indoor power driven transport (height of the obstacles $< 5\%$ of the wheel ϕ): Safety factor: 1.4 to 2.0
4. Outdoor power driven transport: Safety factor: 2.0 to 3.0

02 Agility

*Casters should be flexible, easy and durable; and the rotating parts (legs rotating, wheels rotating) should be made of material with small friction coefficient or accessories assembled after special processing (such as ball bearings or quenching treatment).

*Greater off spacing, more flexible turning. The load capacity is relevant to be reduced.

*The bigger diameter of the wheel is, the less force is required to push, and it is also more friendly to the floor. For the same distance, a bigger wheel rolls more slowly comparing with a smaller one. Slow rolling reduces the heat generation and distortion. It makes bigger wheels more durable. Choose a bigger wheel if the mounting height is allowed.

03 Moving speed

The request of caster speed: at the normal temperature and on the smooth floor, the speed should be lower than $4\text{KM}/\text{H}$ and there are static intervals during the working time.

04 Applied environment

The floor material, barriers, leftovers and the special environment, such as iron scraps, high and low temperature, great acidity and alkalescence, oil liquor, chemistry solvent and anti-static-electricity, should be considered when choosing the casters. The caster used in special environment should be made of special

05 Mounting notice

Plate: the fitted plate must be leveled, hard and firm.

Rigid: the direction of two wheels must be accordant and parallel.

Threaded: A spring shim should be fitted together to avoid loosening.

Wheel Material Capability & Characteristic

Material	Temperature(°C)	Hardness	Walking force	Rotational flexibility	Rotational quietness	Floor protection	Shock resistance	Abrasion resistance	Chemical resistance
PO	-20~80°C	67D	good	good	bad	bad	bad	bad	excellent
PA	-20~100°C	67D	excellent	excellent	bad	bad	bad	good	excellent
TPA	-20~120°C	67D	excellent	excellent	bad	bad	bad	excellent	excellent
TPU	-20~80°C	95±3A	good	good	excellent	excellent	excellent	excellent	good
PU	-20~90°C	88-92A	good	good	excellent	excellent	excellent	excellent	good
TPR	-30~70°C	70±3A	bad	excellent	excellent	excellent	excellent	normal	normal
TPE	-30~70°C	65±3A	bad	excellent	excellent	excellent	excellent	normal	normal
Elastic Rubber	-40~80°C	75±3A	bad	excellent	excellent	excellent	excellent	normal	normal
Cast iron	-50~300°C	---	excellent	excellent	bad	bad	bad	good	excellent

Caster wheels Whole Set Article Number Codes

Brand	Series No.	Type	Diameter (mm) reference	Width(mm) reference	Mounting mode	Treatment	Wheel color	Bearing	Core material	Tire material	Wheel Bracket Type
MY	1	Small 01A	1.5	20	R-Fixed	1-Zinc plated	1-Blue	D-Single bearing	U-Polyurethane	U-Polyurethane	01-Flat Wheel (by default)
	2		2		S-Swivel	2-Electrophoresis	2-Gray	S-Double bearing	L-Aluminum	E-TPE	02-Double Wheel
	3		2.5		T-Total brake	3-Dacromet	3-Black	G-Roller	Z-Cast iron	A-TPA	03-Round Wheel
	4	Light A	2.5	25	SB-Swivel Side brake	4-Chrome plated	4-Red	T-Delrin	N-Nylon	C-TPC	04-Flat core Wheel
	5		3		BS-Bolt hole swivel	5-Color zinc plated	5-White	M-Riveting bearing	H-Phenolic Resin	X-Rubber	05-Hollow wheel
	7	Medium B	3	32	BB-Bolt hole side brake	7-Spray painting	7-Orange		G-Steel	P-plastic	07-Yellow bracket
	8		4		TS-Threaded swivel	8-Stainless steel	8-Green		P-Plastic	R-TPR	
	9		5		TT-Threaded brake	0-Customized	9-Purple		R-Steel rim	V-PVC	
	10	Heavy C	4	50	TB-Threaded side brake		10-cyan-blue		B-Hard rubber	B-Hard rubber	
	11		5		RS-Solid stem swivel		11-Customized				
	12		6		RT-Solid stem brake		12-Transparent				
	13		8		RB-Solid stem side brake		13-Silver				
	14	Super-heavy D	6	75	QS-Square stem swivel		14-maroon				
	15		8		QT-Square stem swivel brake		15-Brown				
	16		10		CS-Central locking stem swivel						
			12		CT-Central locking stem swivel brake						

For example: MY1-C4-50S14SLU

MY-brand,1-Series No., C-heavy duty, 4-wheel diameter, 50-wheel width, S-swivel, 1-zinc plated, 4-red color, S-double ball bearing, L-aluminum core, U-polyurethane tire

Bracket Article Number Codes

Brand	Type	Diameter(in) reference	Width(mm) reference	Mounting mode		Treatment	
MY	Small 01A	1.5	20	R	Fixed	1	Zinc plated
		2		S	Swivel	2	Electrophor osis
		2.5		T	Total brake	3	Dacromet
	Light A	2.5	25	SB	Swivel Side brake	4	Chrome plated
		3		BS	Bolt hole swivel	5	Color zinc plated
		4		BT	Bolt hole brake	6	Painting
	Medium B	3	32	BB	Bolt hole side brake	7	Spray painting
		4		TS	Threaded swivel	8	Stainless steel
		5		TT	Threaded brake	0	Customized
	Heavy C	4	50	TB	Threaded side brake		
		5		RS	Round stem swivel		
		6		RT	Round stem brake		
		8		RB	Round stem side brake		
	Super-heavy D	6	75				
		8					
		10					
		12					

For example: MY-B5-32T1

MY-brand, B-medium duty, 5-for 5 inch wheel, 32-wheel width, T-total brake, 1-zinc plated

Single Wheels Article Number Codes

Brand	Type	Diameter(in) reference	Width(mm) reference	Wheel color		Bearing	Core material	Tire material	Bore Dia.(mm)	Hub Length(mm)	Wheel Bracket Type
MY	Small 01A	1.5	20	1	Blue	D-Single bearing	U-Polyurethane	U-Polyurethane	Based on Real data	Based on Real data	01-Wheel & Bracket(by default)
		2		2	Gray	S-Double bearing	T-Steel	E-TPE			02-Double Wheel
		2.5		3	Black	G-Roller	L-Aluminum	A-TPA			03-Round Wheel
	Light A	2.5	25	4	Red	T-Delrin	Z-Cast iron	C-TPC			04-Flat core Wheel
		3		5	White	M-Riveting bearing	N-Nylon	X-Rubber			05-Hollow wheel
		4		6	Yellow	L-Plain bearing	H-Phenolic Resin	T-TPU			06-EU bracket 2
	Medium B	3	32	7	Orange		S-Stainless steel	P-plastic			
		4		8	Green		G-Steel	B-Hard rubber			
		5		9	Purple		P-Plastic				
	Heavy C	4	50	10	cyan-blue		R-Steel rim				
		5		11	maroon		B-Hard rubber				
		6		12	Customized						
		8									
	Super-heavy D	6	75								
		8									
		10									
		12									

For example: MY-C6-50-8STU

MY-brand, C-heavy duty, 6-wheel diameter, 50-wheel width, 8-green color, S-double ball bearing, T-cast iron ore, U-polyurethane tire

Content

1 Light Duty Casters



Transparent PU Casters.....	P01
Light Duty TPR Casters.....	P01-02
The PU Diamond Casters for the furniture.....	P02-03
Medical casters.....	P03-12
Light Duty Plastic Casters.....	P12-13
Light Duty Stainless Steel White Nylon Casters.....	P13-14
Gray Rubber Casters.....	P14

2 Medium Duty Casters



Medium Duty Gray TPR Casters.....	P15
Medium Duty Super TPR Casters.....	P15
Medium Duty Stainless Steel White Nylon Casters.....	P16
Medium Duty Stainless Steel Casters.....	P17
Medium Duty PVC Casters.....	P17
Medium Duty Claret PU PP Core Casters	P18
Medium Duty Claret Round PVC Casters.....	P18
Medium Duty Claret Round PU Casters.....	P19
Medium Duty Nylon Casters.....	P19
Medium Duty PP Casters.....	P20
Medium Duty PVC PP Casters.....	P20-21
Medium Duty Aluminum Core PU casters.....	P21
Medium Duty American Aluminum Core PU casters.....	P22
Medium Duty PU Cast Iron Casters.....	P22-23
Medium Heavy Duty Bakelite Phenolic Casters.....	P23
Medium Heavy Hard Rubber Casters.....	P23

3 Heavy Duty Single Wheels



Heavy Duty PU Aluminum Core Wheels.....	P24
Heavy Duty Round PU Aluminum Core Wheels.....	P25
Heavy Duty PU on Cast Iron Wheels.....	P26
Industrial Rubber on Aluminum Wheels.....	P27
Heavy Duty Rubber on Cast Iron Wheels.....	P28
Heavy Duty Nylon Wheels.....	P28
Hand Pallet Truck Rollers.....	P29-30

4 Heavy Duty Casters



Super Heavy Duty Steel Core Dual Wheel Casters.....	P31
Super Heavy Duty PU Aluminum Core Dual Wheel Casters.....	P31
Heavy Duty Stainless Steel Casters.....	P31
Heavy Duty PU Aluminum Core Casters.....	P32
Heavy Duty American Type PU Aluminum Core Casters.....	P33
Heavy Duty Round PU Aluminum Core Casters.....	P34
American Type Heavy Duty Rubber Aluminum Core Casters.....	P35
European Type Heavy Duty Pu Aluminum Core Casters.....	P36
European Type Heavy Duty Rubber Aluminum Core Casters.....	P37
European New Type Heavy Duty Rubber Aluminum Core Casters.....	P38
Heavy Duty PU Iron Casters with Blue Bracket.....	P39
Heavy Duty PU Cast Iron Casters.....	P39
Korea Type PU Cast Iron Casters	P40
Heavy Duty Hollow Cast Iron Core Rubber Casters.....	P41
Korea Type High Elastic Rubber Cast Iron Core Casters.....	P42
Super Thermal Plastic Rubber PP Core Casters.....	P42
Korea Type High Elastic PU Cast Iron Core Casters.....	P43
Korea Type PP Core PU Casters.....	P43
European Type Heavy Duty PU PP Core Casters.....	P44
Heavy Duty PP Core PU beacon Casters.....	P45
Heavy Duty White Nylon Casters.....	P45-46
Heavy Duty Plastic Casters.....	P46
Heavy Duty Hollow Cast Iron Casters.....	P47
Heavy Duty Solid Cast Iron Wheel Casters.....	P47

5 Special Casters and Wheels



High Temperature Resistant Glass Fiber Casters.....	P48
Heavy Duty Trash Container Casters.....	P48-49
Low Profile Heavy Duty Casters.....	P49-50
Hard Rubber Spring Loaded Gate Casters.....	P50
Heavy Duty Scaffolding Casters.....	P50-51
Garden Rubber wheels.....	P52-76
Garden Rubber Casters.....	P77-78
Garden and warehouse carts.....	P79-83
Height Adjustable Leveling Casters.....	P51-52
Heavy Duty Shock Absorbing Casters.....	P52

6 Other Accessories



Floor Locks.....	P52-53
Leveling Feet.....	P54-68
Shopping Carts	P69

Light Duty Transparent Furniture Casters (25~50kg)



Swivel



Swivel



Swivel Brake



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia. (mm)	Tread Width (mm)	Total Height (mm)	Plate Size (mm)	Hole Spacing (mm)	Hole Size (mm)	Load Capacity (kg)
Swivel	Swivel Brake								
MY1-01A1.5-24S112LNU	MY1-01A1.5-24T112LNU	PU+PC	35	24	50.5	42X42X2	32X32	4.5	25
MY1-01A2-21S112LNU	MY1-01A2-21T112LNU	PU+PC	50	21	64	42X42X2	32X32	4.5	35
MY1-01A3-23S112LNU	MY1-01A3-23T112LNU	PU+PC	75	23	98	60X60X2	45X45	8.5X6.5	40
MY1-01A4-24S112LNU	MY1-01A4-24T112LNU	PU+PC	100	24	124	60X60X2	45X45	8.5X6.5	50



Stem Swivel

Model No.	Wheel Material					
		Wheel Dia. (mm)	Tread Width (mm)	Total Height (mm)	Thread Size (mm)	Load Capacity (kg)
MY1-01A1.5-24TS112LNU	PU+PC	35	24	50.5	M8X15/M8X25	25
MY1-01A2-21TS112LNU	PU+PC	50	21	64	M10X15/M10X25	35
MY1-01A3-23TS112LNU	PU+PC	75	23	98	M12X25	40
MY1-01A4-24TS112LNU	PU+PC	100	24	124	M12X25	50

Light Duty TPR Casters (50kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia. (mm)	Tread Width (mm)	Total Height (mm)	Plate Size (mm)	Hole Spacing (mm)	Hole Size (mm)	Load Capacity (kg)
Fixed	Swivel	Swivel Brake								
MY1-01A2-18R12LPP	MY1-01A2-18S12LPP	MY1-01A2-18T12LPP	TPR+PP	50	18	73	60X60	48X48	7X12	50



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY1-01A2-18TS12LPR	MY1-01A2-18TT12LPR	TPR+PP	50	18	73	M10X30	50



Bolt Hole Swivel



Bolt Hole Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Hole Size	Load Capacity
Bolt Hole Swivel	Bolt Hole Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY1-01A2-18BS12LPR	MY1-01A2-18BT12LPR	TPR+PP	50	18	73	M12	50

The PU Diamond Casters for furniture (60~80kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY1-01A1.5-21R23SVP	MY1-01A1.5-21S23SVP	MY1-01A1.5-21T23SUP	PVC+PP	40	21	62	60X43X1.5	45X30	1.5	60
MY1-01A2-25R23SVP	MY1-01A2-25S23SVP	MY1-01A2-25T23SUP	PVC+PP	50	25	72	70X51X1.5	52X35	1.8	70
MY1-01A2.5-32R23SVP	MY1-01A2.5-32S23SVP	MY1-01A2.5-32T23SUP	PVC+PP	63	32	92	93X62X1.5	72X45	3	80

Application: It is suitable for cabinets, small equipment and other industries;



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY1-01A1.5-21TS23SVP	MY1-01A1.5-21TT23SVP	PVC+PP	40	21	62	M8/M10X25	60
MY1-01A2-25S23TSVP	MY1-01A2-25TT23SVP	PVC+PP	50	25	72	M8/M10/M12X25	70
MY1-01A2.5-32TS23SVP	MY1-01A2.5-32TT23SVP	PVC+PP	63	32	92	M12X30	80

2 Inch Double Wheel Medical Casters (25kg)



Swivel



Swivel Brake

Model No.		Wheel Material						
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Load Capacity
Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY2-01A2-44RS13LPU-02	MY2-01A2-44RT13LPU-02	TPU	50	44.3	68	42X42	32X32	25



Solid Stem Swivel



Solid Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Solid Stem	Load Capacity
Solid Stem Swivel	Solid Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-01A2-44RS13LPU-02	MY2-01A2-44RT13LPU-02	TPU	50	44.3	62	Φ 11X22	25

Application: It is suitable for hospital, laboratory and healthcare equipment;



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
Stem Swivel	Stem Swivel Brake		Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
			(mm)	(mm)	(mm)	(mm)	(kg)
MY2-01A2-44TS13LPU-02	MY2-01A2-44TT13LPU-02	TPU	50	44.3	63.5	M10X15	25

2.5 Inch Double Wheel Medical Casters (40kg)



Swivel



Swivel Brake

Model No.		Wheel Material						
Swivel	Swivel Brake		Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Load Capacity
			(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY2-01A2.5-44S12LPU-02	MY2-01A2.5-44T12LPU-02	TPU	63	44.3	78.5	42X42	32X32	40



Solid Stem Swivel



Solid Stem Swivel Brake

Model No.		Wheel Material					
Solid Stem Swivel	Solid Stem Swivel Brake		Wheel Dia.	Tread Width	Total Height	Solid Stem	Load Capacity
			(mm)	(mm)	(mm)	(mm)	(kg)
MY2-01A2.5-44RS12LPU-02	MY2-01A2.5-44RT12LPU-02	TPU	63	44.3	72.5	Φ11X22	40

Application: It is suitable for hospital, laboratory and healthcare equipment;



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-01A2.5-44TS12LPU-02	MY2-01A2.5-44TT12LPU-02	TPU	63	44.3	74	M10X15	40

3 Inch Double Wheel Medical Casters (60kg)



Swivel



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-47S13LPU-02	MY2-A3-47TT13LPU-02	High tech PU	75	47.5	102	70*58	54X42	8.5	60



Solid Stem Swivel



Solid Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Solid Stem	Load Capacity
Solid Stem Swivel	Solid Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-47RS13LPU-02	MY2-A3-47RT13LPU-02	High tech PU	75	47.5	102	Φ 22X40	60



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-47TS13LPU-02	MY2-A3-47TT13DUP-02	High tech PU	75	47.5	102	M12X25	60

Two-wheel Medical Casters (60~125kg)



Swivel



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-56TS12LPU-02	MY2-A3-56TT12LPU-02	High tech PU	75	56	102	76X61	50X40 60X45	8.5	60
MY2-A4-56TS12LPU-02	MY2-A4-56TT12LPU-02	High tech PU	100	56	125	90X75	60X50 70X55	8.5	80
MY2-A5-80TS12LPU-02	MY2-A5-80TT12LPU-02	High tech PU	125	80	155	90X75	60X50 70X55	8.5	125



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-56TS12LPU-02	MY2-A3-56TT12LPU-02	High tech PU	75	56	102	M12X25	60
MY2-A4-56TS12LPU-02	MY2-A4-56TT12LPU-02	High tech PU	100	56	125	M12X25	80
MY2-A5-80TS12LPU-02	MY2-A5-80TT12LPU-02	High tech PU	125	80	155	M16X25	125

Two-wheel Medical Casters (60kg)



Swivel



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-56TS12LPU-02	MY2-A3-56TT12LPU-02	High tech PU	75	56	102	76X61	50X40 60X45	8.5	60
MY2-A4-56TS12LPU-02	MY2-A4-56TT12LPU-02	High tech PU	100	56	125	90X75	60X50 70X55	8.5	80
MY2-A5-80TS12LPU-02	MY2-A5-80TT12LPU-02	High tech PU	125	80	155	90X75	60X50 70X55	8.5	125



Solid Stem Swivel



Solid Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Solid stem Size	Load Capacity
Solid Stem Swivel	Solid Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-56RS12LPU-02	MY2-A3-56RT12LPU-02	High tech PU	75	56	102	Φ 28X40	60
MY2-A4-56RS12LPU-02	MY2-A4-56RT12LPU-02	High tech PU	100	56	125	Φ 28X40	80
MY2-A5-80RS12LPU-02	MY2-A5-80RT12LPU-02	High tech PU	125	80	155	Φ 28X40	125



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-56TS12LPU-02	MY2-A3-56TT12LPU-02	High tech PU	75	56	102	M12X25	60
MY2-A4-56TS12LPU-02	MY2-A4-56TT12LPU-02	High tech PU	100	56	125	M12X25	80
MY2-A5-80TS12LPU-02	MY2-A5-80TT12LPU-02	High tech PU	125	80	155	M16X25	125

Two-wheel Medical Casters (60~125kg)



Swivel



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-56TS12LPU-02	MY2-A3-56TT12LPU-02	High tech PU	75	56	102	76X61	50X40 60X45	8.5	60
MY2-A4-56TS12LPU-02	MY2-A4-56TT12LPU-02	High tech PU	100	56	125	90X75	60X50 70X55	8.5	80
MY2-A5-80TS12LPU-02	MY2-A5-80TT12LPU-02	High tech PU	125	80	155	90X75	60X50 70X55	8.5	125



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-56TS12LPU-02	MY2-A3-56TT12LPU-02	High tech PU	75	56	102	M12X25	60
MY2-A4-56TS12LPU-02	MY2-A4-56TT12LPU-02	High tech PU	100	56	125	M12X25	80
MY2-A5-80TS12LPU-02	MY2-A5-80TT12LPU-02	High tech PU	125	80	155	M16X25	125

Cladding Medical Treatment Casters (75~110kg)



Swivel



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-32S12LPR	MY2-A3-32T12LPR	Super TPR	75	32	108	95X63	75X45	8.5	75
MY2-A4-32S12LPR	MY2-A4-32T12LPR	Super TPR	100	32	133	95X63	75X45	8.5	90
MY2-A5-32S12LPR	MY2-A5-32T12LPR	Super TPR	125	32	158	95X63	75X45	8.5	110



Solid Stem Swivel



Solid Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-32RS12LPR	MY2-A3-32RT12LPR	Super TPR	75	32	108	Φ28X40	75
MY2-A4-32RS12LPR	MY2-A4-32RT12LPR	Super TPR	100	32	133	Φ28X40	90
MY2-A5-32RS12LPR	MY2-A5-32RT12LPR	Super TPR	125	32	158	Φ28X40	110



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-32TS12LPR	MY2-A3-32TT12LPR	Super TPR	75	32	108	M12X25	75
MY2-A4-32TS12LPR	MY2-A4-32TT12LPR	Super TPR	100	32	133	M12X25	90
MY2-A5-32TS12LPR	MY2-A5-32TT12LPR	Super TPR	125	32	158	M12X30	110

Two-wheel Medical Casters (60kg)



Swivel



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-32S12LPU	MY2-A3-32T12LPU	High tech PU	75	32	110	95X63	75X45	8.5	70
MY2-A4-32S12LPU	MY2-A4-32T12LPU	High tech PU	100	32	135	95X63	75X45	8.5	90
MY2-A5-32S12LPU	MY2-A5-32T12LPU	High tech PU	125	32	160	95X63	75X45	8.5	110



Solid Stem Swivel



Solid Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Solid Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-32RS12LPU	MY2-A3-32RT12LPU	High tech PU	75	32	110	Φ 28X40	70
MY2-A4-32RS12LPU	MY2-A4-32RT12LPU	High tech PU	100	32	135	Φ 28X40	90
MY2-A5-32RS12LPU	MY2-A5-32RT12LPU	High tech PU	125	32	160	Φ 28X40	110



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
Stem Swivel	Stem Swivel Brake		Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
			(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-32TS12LPU	MY2-A3-32TT12LPU	High tech PU	75	32	110	M12X25	70
MY2-A4-32TS12LPU	MY2-A4-32TT12LPU	High tech PU	100	32	135	M12X25	90
MY2-A5-32TS12LPU	MY2-A5-32TT12LPU	High tech PU	125	32	160	M12X25	110



Square Stem Swivel




Square Stem Swivel Brake

Model No.		Wheel Material							
Square stem swivel	Square stem swivel brake		Wheel Dia.	Tread Width	Total Height	Plate Size1	Plate Size2	Hole Size	Load Capacity
			(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-32QS12LPR	MY2-A3-32QT12LPR	High tech PU	75	32	108	22/47	47/55	8.5	75
MY2-A4-32QS12LPR	MY2-A4-32QT12LPR	High tech PU	100	32	133	22/47	47/55	8.5	90
MY2-A5-32QS12LPR	MY2-A5-32QT12LPR	High tech PU	125	32	158	22/47	47/55	8.5	110

High Quality Medical Central Locking Casters (100~50kg)



Stem Swivel




• E2 (long stem) Φ28x98.5(mm)

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A5-80CS12LPR-02	Super TPR	125	60	160	Φ28X98.5	100
MY2-A5-80CS12LPR-02	Super TPR	150	60	185	Φ28X98.5	150



Stem Swivel



• E2 (long stem) $\Phi 28 \times 98.5$ (mm)

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A5-80CS12LPU-02	High tech PU	125	60	160	$\Phi 28 \times 98.5$	100
MY2-A5-80CS12LPU-02	High tech PU	150	60	185	$\Phi 28 \times 98.5$	150

Round TPR PP Housing Medical Casters (90~135kg)



Swivel



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
			(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
Swivel	Swivel Brake	TPR+PP	76	32	120	96X63	75X45X3.5	8.5X12	90
MY2-A3-32S12LPR-03	MY2-A3-32T12LPR-03		100	32	149	96X63	75X45X3.5	8.5X12	120
MY2-A4-32S12LPR-03	MY2-A4-32T12LPR-03		126	32	178	96X63	75X45X3.5	8.5X12	135



Solid Stem Swivel



Solid Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
			(mm)	(mm)	(mm)	(mm)	(kg)
Solid Stem Swivel	Solid Stem Swivel Brake	TPR+PP	76	32	120	28X45	90
MY2-A3-32RS12LPR-03	MY2-A3-32RT12LPR-03		100	32	149	28X45	120
MY2-A4-32RS12LPR-03	MY2-A4-32RT12LPR-03		126	32	178	28X45	135



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Thread Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-32TS12LPR-03	MY2-A3-32TT12LPR-03	TPR+PP	76	32	120	M12X25	90
MY2-A4-32TS12LPR-03	MY2-A4-32TT12LPR-03	TPR+PP	100	32	149	M12X25	120
MY2-A5-32TS12LPR-03	MY2-A5-32TT12LPR-03	TPR+PP	126	32	178	M12X25	135



Bolt Hole Swivel



Bolt Hole Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Bolt Hole Size	Load Capacity
Bolt Hole Swivel	Bolt Hole Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY2-A3-32BS12LPR-03	MY2-A3-32BT12LPR-03	TPR+PP	76	32	120	13.1	90
MY2-A4-32BS12LPR-03	MY2-A4-32BT12LPR-03	TPR+PP	100	32	149	13.1	120
MY2-A5-32BS12LPR-03	MY2-A5-32BT12LPR-03	TPR+PP	126	32	178	13.1	135

Light Duty Plastic Casters (10~65kg)



Fixed



Swivel



Swivel Side Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Side Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY3-A1-12R15LP	MY3-A1-12S15LP	MY3-A1-12T15LP	Plastic	25	12	35	38X32	28X23	5	10
MY3-A1-14R15LP	MY3-A1-14S15LP	MY3-A1-14T15LP	Plastic	30	14	42	38X32	28X23	5	20
MY3-A1.5-17R15LP	MY3-A1.5-17S15LP	MY3-A1.5-17T15LP	Plastic	38	17	50	47X40	35X28	5	30
MY3-A2-20R15LP	MY3-A2-20S15LP	MY3-A2-20T15LP	Plastic	50	20	65	60X46	46X35	6	40
MY3-A2.5-25R15LP	MY3-A2.5-25S15LP	MY3-A2.5-25T15LP	Plastic	65	25	80	70X58	54X42	8.2	55
MY3-A3-25R15LP	MY3-A3-25S15LP	MY3-A3-25T15LP	Plastic	75	25	90	70X58	54X42	8.2	65



Stem Swivel



Stem Swivel Side Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Thread Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY3-A1-12TS15LP	MY3-A1-12TB15LP	Plastic	25	12	35	M8/10X15	10
MY3-A1-14TS15LP	MY3-A1-14TB15LP	Plastic	30	14	42	M10X15	20
MY3-A1.5-17TS15LP	MY3-A1.5-17TB15LP	Plastic	38	17	50	M10X15	30
MY3-A2-20TS15LP	MY3-A2-20TB15LP	Plastic	50	20	65	M10X15	40
MY3-A2.5-25TS15LP	MY3-A2.5-25TB15LP	Plastic	65	25	80	M12X25	55
MY3-A3-25TS15LP	MY3-A3-25TB15LP	Plastic	75	25	90	M12X25	65

Light Duty Stainless Steel White Nylon Casters (30~50kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY3-A1.5-22R85SN	MY3-A1.5-22S85SN	MY3-A1.5-22T85SN	Nylon	38	22	60	54X44	40X30	6.3	30
MY3-A2-22R85SN	MY3-A2-22S85SN	MY3-A2-22T85SN	Nylon	50	22	70	54X44	40X30	6.3	50



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY3-A1.5-22TS85SN	MY3-A1.5-22TT85SN	Nylon	38	22	60	M10X30	30
MY3-A2-22TS85SN	MY3-A2-22TT85SN	Nylon	50	22	70	M10X30	50



Bolt Hole Swivel Brake

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Total Height	Hole Size	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY3-A1.5-22BT85SN	Nylon	38	22	60	M10	30
MY3-A2-22BT85SN	Nylon	50	22	70	M10	50

Gray Rubber Casters (35~85kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY3-A2-17R12SPR	MY3-A2-17S12SPR	MY3-A2-17T12SPR	Gray rubber	50	17	69	50X50	36X36	8.5	35
MY3-A2.5-21R12SPR	MY3-A2.5-21S12SPR	MY3-A2.5-21T12SPR	Gray rubber	65	21	90	65X65	49X49	8.5	40
MY3-A3-21R12SPR	MY3-A3-21S12SPR	MY3-A3-21T12SPR	Gray rubber	75	21	100	65X65	49X49	8.5	45
MY3-A4-27R12SPR	MY3-A4-27S12SPR	MY3-A4-27T12SPR	Gray rubber	100	27	130	76X76	57X57	8.5	65
MY3-A5-27R12SPR	MY3-A5-27S12SPR	MY3-A5-27T12SPR	Gray rubber	125	27	155	76X76	57X57	8.5	85



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY3-A2-17TS12SPR	MY3-A2-17TT12SPR	Gray rubber	50	17	69	M10/12X30	35
MY3-A2.5-21TS12SPR	MY3-A2.5-21TT12SPR	Gray rubber	65	21	90	M12X30	40
MY3-A3-21TS12SPR	MY3-A3-21TT12SPR	Gray rubber	75	21	100	M12/16X30	45
MY3-A4-27S12SPR	MY3-A4-27T12SPR	Gray rubber	100	27	130	M12/16X30	65
MY3-A5-27S12SPR	MY3-A5-27T12SPR	Gray rubber	125	27	157	M12/16X30	85

Medium Duty Gray TPR Casters (70~120kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia. (mm)	Tread Width (mm)	Total Height (mm)	Plate Size (mm)	Hole Spacing (mm)	Hole Size (mm)	Load Capacity (kg)
Fixed	Swivel	Swivel Brake	TPR	75	32	110	95X63	75X45	8.5	70
MY4-B3-32R12SPR	MY4-B3-32S12SPR	MY4-B3-32T12SPR		100	32	135	95X63	75X45	8.5	90
MY4-B4-32R12SPR	MY4-B4-32S12SPR	MY4-B4-32T12SPR		125	32	160	95X63	75X45	8.5	120



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia. (mm)	Tread Width (mm)	Total Height (mm)	Thread Size (mm)	Load Capacity (kg)
MY4-B3-32TS12SPR	MY4-B3-32TT12SPR	TPR	75	32	106	M12X30	70
MY4-B4-32TS12SPR	MY4-B4-32TT12SPR		100	32	132	M12X30	90
MY4-B5-32TS12SPR	MY4-B5-32TT12SPR		125	32	157	M12X30	120

Medium Duty Super TPR Casters (90~140kg)



Fixed



Swivel



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia. (mm)	Tread Width (mm)	Total Height (mm)	Plate Size (mm)	Hole Spacing (mm)	Hole Size (mm)	Load Capacity (kg)
Swivel	Swivel Brake	Super TPR	75	32	105	92X73	74.6X44.5	8.7	90
MY4-B3-32S12SPR	MY4-B3-32T12SPR		100	32	130	92X73	74.6X44.5	8.7	120
MY4-B4-32S12SPR	MY4-B4-32T12SPR		125	32	157	92X73	74.6X44.5	8.7	140

Medium Duty Stainless Steel White Nylon Casters (95~135kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32B85SN	MY4-B3-32S85SN	MY4-B3-32T85SN	Nylon	75	32	114	95X70	74X47	13X9	95
MY4-B4-32B85SN	MY4-B4-32S85SN	MY4-B3-32T85SN	Nylon	100	32	127	95X70	74X47	13X9	120
MY4-B5-32B85SN	MY4-B5-32S85SN	MY4-B3-32T85SN	Nylon	125	32	161	95X70	74X47	13X9	135



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32TS85SN	MY4-B3-32TT85SN	Nylon	75	32	114	M12X30	95
MY4-B4-32TS85SN	MY4-B3-32TT85SN	Nylon	100	32	127	M12X30	120
MY4-B5-32TS85SN	MY4-B3-32TT85SN	Nylon	125	32	161	M12X30	135

Medium Duty Stainless Steel Casters (95~135kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32R813SS	MY4-B3-32S813SS	MY4-B3-32T813SS	SUS 304	75	32	114	95X70	74X47	13X9	95
MY4-B4-32R813SS	MY4-B4-32S813SS	MY4-B3-32T813SS	SUS 304	100	32	127	95X70	74X47	13X9	120
MY4-B5-32R813SS	MY4-B5-32S813SS	MY4-B3-32T813SS	SUS 304	125	32	161	95X70	74X47	13X9	135



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32TS813SS	MY4-B3-32TT813SS	SUS 304	75	32	114	M12X30	95
MY4-B4-32TS813SS	MY4-B3-32TT813SS	SUS 304	100	32	127	M12X30	120
MY4-B5-32TS813SS	MY4-B3-32TT813SS	SUS 304	125	32	161	M12X30	135

Medium Duty PVC Casters (90~140kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32R13SPV	MY4-B3-32S13SPV	MY4-B3-32T13SPV	PVC+PP	75	32	105	92X73	74.6X44.5	8.7	90
MY4-B4-32R13SPV	MY4-B4-32S13SPV	MY4-B4-32T13SPV	PVC+PP	100	32	130	92X73	74.6X44.5	8.7	120
MY4-B5-32R13SPV	MY4-B5-32S13SPV	MY4-B5-32T13SPV	PVC+PP	125	32	157	92X73	74.6X44.5	8.7	140

Medium Duty Claret PU PP Core Casters (90~140kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32R14SPU-03	MY4-B3-32S14SPU-03	MY4-B3-32T14SPU-03	PU+PP	75	32	105	92X73	74.6X44.5	8.7	90
MY4-B4-32R14SPU-03	MY4-B4-32S14SPU-03	MY4-B4-32T14SPU-03	PU+PP	100	32	130	92X73	74.6X44.5	8.7	120
MY4-B5-32R14SPU-03	MY4-B5-32S14SPU-03	MY4-B5-32T14SPU-03	PU+PP	125	32	157	92X73	74.6X44.5	8.7	140

Medium Duty Round PVC Casters (90~140kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32R14SPV-03	MY4-B3-32S14SPV-03	MY4-B3-32T14SPV-03	PVC+PP	75	32	105	92X73	74.6X44.5	8.7	90
MY4-B4-32R14SPV-03	MY4-B4-32S14SPV-03	MY4-B4-32T14SPV-03	PVC+PP	100	32	130	92X73	74.6X44.5	8.7	120
MY4-B5-32R14SPV-03	MY4-B5-32S14SPV-03	MY4-B5-32T14SPV-03	PVC+PP	125	32	157	92X73	74.6X44.5	8.7	140



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32TS14SPV-03	MY4-B3-32TT14SPV-03	PVC+PP	75	32	107	M12X25	90
MY4-B4-32TS14SPV-03	MY4-B4-32TT14SPV-03	PVC+PP	100	32	130	M12X25	120
MY4-B5-32TS14-03SPV	MY4-B5-32TT14SPV-03	PVC+PP	125	32	157	M12X25	140

Medium Duty Claret Round PU Casters (90~140kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32R14SPU-03	MY4-B3-32S14SPU-03	MY4-B3-32T14SPU-03	PVC+PP	75	32	105	92X73	74.6X44.5	8.7	90
MY4-B4-32R14SPU-03	MY4-B4-32S14SPU-03	MY4-B4-32T14SPU-03	PVC+PP	100	32	130	92X73	74.6X44.5	8.7	120
MY4-B5-32R14SPU-03	MY4-B5-32S14SPU-03	MY4-B5-32T14SPU-03	PVC+PP	125	32	157	92X73	74.6X44.5	8.7	140

Medium Duty Nylon Casters (90~140kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-31R15SN	MY4-B3-31S15SN	MY4-B3-31T15SN	Nylon	75	32	105	92X73	74.6X44.5	8.7	90
MY4-B4-31R15SN	MY4-B4-31S15SN	MY4-B4-31T15SN	Nylon	100	32	130	92X73	74.6X44.5	8.7	120
MY4-B5-31R15SN	MY4-B5-31S15SN	MY4-B5-31T15SN	Nylon	125	32	157	92X73	74.6X44.5	8.7	140



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32TS15SN	MY4-B3-32TT15SN	Nylon	75	32	107	M12X25	90
MY4-B4-32TS15SN	MY4-B4-32TT15SN	Nylon	100	32	130	M12X25	120
MY4-B5-32TS15SN	MY4-B5-32TT15SN	Nylon	125	32	157	M12X25	140

Medium Duty PP Casters (90~140kg)










Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-31R15SP	MY4-B3-31S15SP	MY4-B3-31T15SP	PP	75	31	105	92X73	74.6X44.5	8.7	90
MY4-B4-31R15SP	MY4-B4-31S15SP	MY4-B4-31T15SP	PP	100	31	130	92X73	74.6X44.5	8.7	120
MY4-B5-31R15SP	MY4-B5-31S15SP	MY4-B5-31T15SP	PP	125	31	157	92X73	74.6X44.5	8.7	140

Medium Duty PVC PP Casters (90~140kg)










Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Fixed	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32R17SPV	MY4-B3-32S17SPV	MY4-B3-32T17SPV	PVC+PP	75	32	105	92X73	74.6X44.5	8.7	90
MY4-B4-32R17SPV	MY4-B4-32S17SPV	MY4-B4-32T17SPV	PVC+PP	100	32	130	92X73	74.6X44.5	8.7	120
MY4-B5-32R17SPV	MY4-B5-32S17SPV	MY4-B5-32T17SPV	PVC+PP	125	32	157	92X73	74.6X44.5	8.7	140

4

SERIES






MEDIUM DUTY CASTERS



Stem Swivel








Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Stem Swivel	Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32TS17SPV	MY4-B3-32TT17SPV	PVC+PP	75	32	107	M12X25	90
MY4-B4-32TS17SPV	MY4-B4-32TT17SPV	PVC+PP	100	32	130	M12X25	120
MY4-B5-32TS17SPV	MY4-B5-32TT17SPV	PVC+PP	125	32	157	M12X25	140

Medium Duty Aluminum Core PU casters (90~140kg)



Aluminum core single wheel

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-326SLU10.35	PU Aluminum	75	32	10X35	6001X2	90
MY4-B4-326SLU10.35	PU Aluminum	100	32	10X35	6001X2	120
MY4-B5-326SLU10.35	PU Aluminum	125	32	10X35	6001X2	140










Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32R16SLU10.35	MY4-B3-32S16SLU10.35	MY4-B3-32T16SLU10.35	PU Aluminum	75	32	105	92X73	74.6X44.5	8.7	90
MY4-B4-32R16SLU10.35	MY4-B4-32S16SLU10.35	MY4-B4-32T16SLU10.35	PU Aluminum	100	32	130	92X73	74.6X44.5	8.7	120
MY4-B5-32R16SLU10.35	MY4-B5-32S16SLU10.35	MY4-B5-32T16SLU10.35	PU Aluminum	125	32	157	92X73	74.6X44.5	8.7	140

Medium Duty American Aluminum Core PU casters (90~140kg)



Aluminum core single wheel

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-326SLU10.35-4	PU Aluminum	75	32	10X35	6001X2	90
MY4-B4-326SLU10.35-4	PU Aluminum	100	32	10X35	6001X2	120
MY4-B5-326SLU10.35-4	PU Aluminum	125	32	10X35	6001X2	140



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32R16SLU10.35-4	MY4-B3-32S16SLU10.35-4	MY4-B3-32T16SLU10.35-4	PU Aluminum	75	32	105	92X73	74.6X44.5	8.7	90
MY4-B4-32R16SLU10.35-4	MY4-B4-32S16SLU10.35-4	MY4-B4-32T16SLU10.35-4	PU Aluminum	100	32	130	92X73	74.6X44.5	8.7	120
MY4-B5-32R16SLU10.35-4	MY4-B5-32S16SLU10.35-4	MY4-B5-32T16SLU10.35-4	PU Aluminum	125	32	157	92X73	74.6X44.5	8.7	140

Medium Duty PU Cast Iron Casters (90~140kg)



PU cast iron single wheel

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-324SZU10.35	PU Cast Iron	75	32	10X35	6001X2	100
MY4-B4-324SZU10.35	PU Cast Iron	100	32	10X35	6001X2	130
MY4-B5-324SZU10.35	PU Cast Iron	125	32	10X35	6001X2	170

4

SERIES

MEDIUM DUTY CASTERS



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32R14SZU10.35	MY4-B3-32S14SZU10.35	MY4-B3-32T14SZU10.35	PU Cast Iron	75	32	105	92X73	74.6X44.5	8.7	90
MY4-B4-32R14SZU10.35	MY4-B4-32S14SZU10.35	MY4-B4-32T14SZU10.35	PU Cast Iron	100	32	130	92X73	74.6X44.5	8.7	120
MY4-B5-32R14SZU10.35	MY4-B5-32S14SZU10.35	MY4-B5-32T14SZU10.35	PU Cast Iron	125	32	157	92X73	74.6X44.5	8.7	140

Medium Heavy Duty PU Aluminum Core Casters (90~140kg)



Fixed



Swivel

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32R115GH	MY4-B3-32S115GH	MY4-B3-32T115GH	Bakelite Phenolic	75	32	105	92X73	74.6X44.5	8.7	90
MY4-B4-32R115GH	MY4-B4-32S115GH	MY4-B4-32T115GH	Bakelite Phenolic	100	32	130	92X73	74.6X44.5	8.7	120
MY4-B5-32R115GH	MY4-B5-32S115GH	MY4-B5-32T115GH	Bakelite Phenolic	125	32	157	92X73	74.6X44.5	8.7	140

Medium Heavy Hard Rubber Casters (90~140kg)



Fixed








Swivel

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY4-B3-32R13SR	MY4-B3-32S13SR	MY4-B3-32T13SR	Hard rubber	75	32	105	92X73	74.6X44.5	8.7	90
MY4-B4-32R13SR	MY4-B4-32S13SR	MY4-B4-32T13SR	Hard rubber	100	32	130	92X73	74.6X44.5	8.7	120
MY4-B5-32R13SR	MY4-B5-32S13SR	MY4-B5-32T13SR	Hard rubber	125	32	157	92X73	74.6X44.5	8.7	140

Heavy Duty PU Aluminum Core Wheels (250~1300kg)






Aluminum core Polyurethane Wheel



Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-506SLU20.60	PU Aluminum	100	50	20X60	6204X2	300
MY5-C5-506SLU20.60	PU Aluminum	125	50	20X60	6204X2	350
MY5-C6-506SLU20.60	PU Aluminum	150	50	20X60	6204X2	500
MY5-C8-506SLU20.60	PU Aluminum	200	50	20X60	6204X2	800






American type aluminum core PU wheel



Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C5-509GLU19.56-4	PU Aluminum	125	50	19X56	Roller bearing	300
MY5-C6-509GLU19.56-4	PU Aluminum	152	50	19X56	Roller bearing	550
MY5-C8-509GLU19.56-4	PU Aluminum	200	50	19X56	Roller bearing	800

Aluminum core polyurethane wheel








Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-504SLU20.56	PU Aluminum	100	50	20X56	6204X2	300
MY5-C5-504SLU20.56	PU Aluminum	125	50	20X56	6204X2	350
MY5-C6-504SLU20.56	PU Aluminum	152	50	20X56	6204X2	500
MY5-C8-504SLU20.56	PU Aluminum	200	60	20X56	6204X2	750

Heavy Duty Round PU Aluminum Core Wheels (200~850kg)






Thickened round polyurethane aluminum core wheel



Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C5-507SLU20.60-03	PU Aluminum	125	50	20X60	6204X2	350
MY5-C6-507SLU20.60-03	PU Aluminum	150	50	20X60	6204X2	600
MY5-C8-507SLU20.60-03	PU Aluminum	200	50	20X60	6204X2	850






Crown PU aluminum core wheel



Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-507SLU17.56-03	PU Aluminum	100	50	17X56	6203X2	200
MY5-C4-507SLU20.56-03	PU Aluminum	100	50	20X56	6204X2	250
MY5-C5-507SLU17.56-03	PU Aluminum	125	50	17X56	6203X2	300
MY5-C5-507SLU20.56-03	PU Aluminum	125	50	20X56	6204X2	350
MY5-C6-507SLU17.56-03	PU Aluminum	152	50	17X56	6203X2	550
MY5-C6-507SLU20.56-03	PU Aluminum	152	50	20X56	6204X2	600
MY5-C8-507SLU17.56-03	PU Aluminum	200	60	17X56	6203X2	700
MY5-C8-507SLU20.56-03	PU Aluminum	200	60	20X56	6204X2	850

Crown PU aluminum core wheel



Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C5-507SLU17.50-03	PU Aluminum	125	50	17X50	6203X2	300
MY5-C6-507SLU17.50-03	PU Aluminum	150	50	17X50	6203X2	400

Heavy Duty PU on Cast Iron Wheels (200~550kg)

Cast Iron Heavy Plain PU Wheel




Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-504SZU17.56	PU Cast Iron	100	50	17X56	6203X2	200
MY5-C4-404SZU17.50	PU Cast Iron	100	40	17X50	6203X2	250
MY5-C4-504SZU17.56	PU Cast Iron	100	50	17X56	6202X2	200
MY5-C5-504SZU17.56	PU Cast Iron	125	50	17X56	6203X2	250
MY5-C5-404SZU17.50	PU Cast Iron	125	40	17X50	6203X2	250
MY5-C5-504SZU17.56	PU Cast Iron	125	50	17X56	6202X2	250
MY5-C6-504SZU17.56	PU Cast Iron	150	50	17X56	6203X2	350
MY5-C6-404SZU17.50	PU Cast Iron	150	40	17X50	6203X2	350
MY5-C6-504SZU17.56	PU Cast Iron	150	50	17X56	6202X2	350
MY5-C8-504SZU17.56	PU Cast Iron	200	50	17X56	6203X2	450
MY5-C8-404SZU17.50	PU Cast Iron	200	40	17X50	6203X2	450
MY5-C8-504SZU17.56	PU Cast Iron	200	50	17X56	6202X2	450

Cast Iron Crown Surface PU Wheel



Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-504SZU19.60	PU Cast Iron	100	50	19X60	6203X2	200
MY5-C5-504SZU19.60	PU Cast Iron	125	50	19X60	6203X2	300
MY5-C6-504SZU19.60	PU Cast Iron	150	50	19X60	6203X2	400
MY5-C8-504SZU19.60	PU Cast Iron	200	50	19X60	6203X2	550

Cast Iron straight Through PU Wheel



Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-504GZU19.60	PU Cast Iron	100	50	19X60	Roller bearing	200
MY5-C5-504GZU19.60	PU Cast Iron	125	50	19X60	Roller bearing	250
MY5-C6-504GZU19.60	PU Cast Iron	150	50	19X60	Roller bearing	300
MY5-C8-504GZU19.60	PU Cast Iron	200	50	19X60	Roller bearing	350
MY5-C10-504GZU19.60	PU Cast Iron	250	50	19X60	Roller bearing	400

Industrial Rubber on Aluminum Wheels (200~650kg)

Industrial Rubber on Aluminum Wheels



Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-503SLX17.56	Rubber Aluminum	100	50	17X56	6203X2	200
MY5-C5-503SLX20.60	Rubber Aluminum	125	50	20X60	6204X2	250
MY5-C5-503SLX20.56	Rubber Aluminum	125	50	20X56	6204X2	250
MY5-C5-503SLX17.56	Rubber Aluminum	125	50	17X56	6203X2	250
MY5-C6-503SLX20.60	Rubber Aluminum	150	50	20X60	6204X2	300
MY5-C6-503SLX20.56	Rubber Aluminum	150	50	20X56	6204X2	280
MY5-C6-503SLX17.56	Rubber Aluminum	150	50	17X56	6204X2	280
MY5-C6.5-503SLX20.60	Rubber Aluminum	160	50	20X60	6204X2	320
MY5-C7-503SLX20.60	Rubber Aluminum	180	50	20X60	6204X2	350
MY5-C8-503SLX20.60	Rubber Aluminum	200	50	20X60	6204X2	400
MY5-C8-503SLX17.56	Rubber Aluminum	200	50	17X56	6203X2	350
MY5-C8-503SLX20.70	Rubber Aluminum	250	60	20X70	6204X2	650

Rubber aluminum core single wheel








Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-502SLX20.60	Rubber aluminum	100	50	20X60	6204X2	150
MY5-C5-502SLX20.60	Rubber aluminum	125	50	20X60	6204X2	200
MY5-C6-502SLX20.60	Rubber aluminum	150	50	20X60	6204X2	300
MY5-C6.5-502SLX20.60	Rubber aluminum	160	50	20X60	6204X2	350
MY5-C8-502SLX20.60	Rubber aluminum	200	50	20X60	6204X2	400

Rubber Cast Iron core single wheel (250~500kg)

Rubber Hollow Cast Iron core single wheel








Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-503GZX19.60-06	Rubber Cast Iron	100	50	19X60	Roller bearing	250
MY5-C5-503GZX19.60-06	Rubber Cast Iron	125	50	19X60	Roller bearing	300
MY5-C6-503GZX19.60-06	Rubber Cast Iron	150	50	19X60	Roller bearing	350
MY5-C8-503GZX19.60-06	Rubber Cast Iron	200	50	19X60	Roller bearing	400
MY5-C10-503GZX19.60-06	Rubber Cast Iron	250	50	19X60	Roller bearing	500

White Nylon single wheel (250~400kg)

White Nylon single wheel









Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-505SN15.56	Nylon	100	50	15X56	6202X2	250
MY5-C5-505SN15.56	Nylon	125	50	15X56	6202X2	300
MY5-C6-505SN15.56	Nylon	150	50	15X56	6202X2	350
MY5-C8-505SN15.56	Nylon	200	50	15X56	6202X2	400

Hand Pallet Truck Rollers (180~900kg)







PU Rollers



Model No.						
	Wheel Dia*Width (mm)	Axel Bore Φ (mm)	Hub Length (mm)	Wheel core (mm)	Bearing /	Load Capacity (kgs)
MYS-C2.5-354SZU15.35	60*35	15	35	32*9	6002ZZ	180
MYS-C2.5-604SZU10.56	60*60	10	56	30*11	6200ZZ	320
MYS-C3-404SZU20.40	75*40	20	40	47*14	6204ZZ	270
MYS-C3-624SZU20.62	75*62	20	62	47*14	6204ZZ	410
MYS-C3-754SZU20.75	75*75	20	75	47*14	6204ZZ	500
MYS-C3-954SZU20.95	75*95	20	95	47*14	6204ZZ	640
MYS-C3-304SZU12.27	80*30	12	27	32*12	6201ZZ	210
MYS-C3-404SZU20.40	80*40	20	40	47*14	6204ZZ	280
MYS-C3-544SZU20.54	80*54	20	54	47*14	6204ZZ	380
MYS-C3-564SZU20.56	80*56	20	56	47*14	6204ZZ	400
MYS-C3-604SZU20.66	80*60	20	66	47*14	6204ZZ	420
MYS-C3-624SZU20.54	80*62	20	54	47*14	6204ZZ	440
MYS-C3-704SZU20.70	80*70	20	70	47*14	6204ZZ	500
MYS-C3-744SZU20.68	80*74	20	68	42*14	6004ZZ	530
MYS-C3-804SZU20.80	80*80	20	80	47*14	6204ZZ	570
MYS-C3-954SZU20.89	80*95	20	89	42*14	6004ZZ	680
MYS-C3-504SZU20.52	82*50	20	52	47*13	6204ZZ	360
MYS-C3-604SZU20.60	82*60	20	60	42*14	6004ZZ	440
MYS-C3-604SZU25.60	82*60	25	60	47*14	6005ZZ	440
MYS-C3-624SZU20.64	82*62	20	64	47*13	6204ZZ	450
MYS-C3-654SZU20.65	82*65	20	65	47*14	6204ZZ	470
MYS-C3-704SZU20.70	82*70	20	70	47*14	6204ZZ	510
MYS-C3-804SZU20.80	82*80	20	80	47*14	6204ZZ	580
MYS-C3-904SZU20.90	82*90	20	90	47*14	6204ZZ	660
MYS-C3-1004SZU20.100	82*100	20	100	47*14	6204ZZ	730
MYS-C3.5-704SZU20.70	85*70	20	70	47*14	6204ZZ	530
MYS-C3.5-804SZU25.80	85*80	25	80	47*14	6005ZZ	530
MYS-C3.5-904SZU20.90	85*90	20	90	47*14	6204ZZ	680
MYS-C3.5-1004SZU25.100	85*100	25	100	47*14	6005ZZ	760
MYS-C3.5-1204SZU25.124	85*120	25	124	47*14	6005ZZ	900

White Nylon Rollers



Model No.						
	Wheel Dia*Width	Axle Bore Φ	Hub Length	Wheel core	Ball bearing	Load Capacity
	(mm)	(mm)	(mm)	(mm)	/	(kgs)
MYS-C2.5-354SZU15.35	60*35	15	35	32*9	6002ZZ	180
MYS-C2.5-604SZU10.56	60*60	10	56	30*11	6200ZZ	320
MYS-C3-404SZU20.40	75*40	20	40	47*14	6204ZZ	270
MYS-C3-624SZU20.62	75*62	20	62	47*14	6204ZZ	410
MYS-C3-754SZU20.75	75*75	20	75	47*14	6204ZZ	500
MYS-C3-954SZU20.95	75*95	20	95	47*14	6204ZZ	640
MYS-C3-304SZU12.27	80*30	12	27	32*12	6201ZZ	210
MYS-C3-404SZU20.40	80*40	20	40	47*14	6204ZZ	280
MYS-C3-544SZU20.54	80*54	20	54	47*14	6204ZZ	380
MYS-C3-564SZU20.56	80*56	20	56	47*14	6204ZZ	400
MYS-C3-604SZU20.66	80*60	20	66	47*14	6204ZZ	420
MYS-C3-624SZU20.54	80*62	20	54	47*14	6204ZZ	440
MYS-C3-704SZU20.70	80*70	20	70	47*14	6204ZZ	500
MYS-C3-744SZU20.68	80*74	20	68	42*14	6004ZZ	530
MYS-C3-804SZU20.80	80*80	20	80	47*14	6204ZZ	570
MYS-C3-954SZU20.89	80*95	20	89	42*14	6004ZZ	680
MYS-C3-504SZU20.52	82*50	20	52	47*13	6204ZZ	360
MYS-C3-604SZU20.60	82*60	20	60	42*14	6004ZZ	440
MYS-C3-604SZU25.60	82*60	25	60	47*14	6005ZZ	440
MYS-C3-624SZU20.64	82*62	20	64	47*13	6204ZZ	450
MYS-C3-654SZU20.65	82*65	20	65	47*14	6204ZZ	470
MYS-C3-704SZU20.70	82*70	20	70	47*14	6204ZZ	510
MYS-C3-804SZU20.80	82*80	20	80	47*14	6204ZZ	580
MYS-C3-904SZU20.90	82*90	20	90	47*14	6204ZZ	660
MYS-C3-1004SZU20.100	82*100	20	100	47*14	6204ZZ	730
MYS-C3.5-704SZU20.70	85*70	20	70	47*14	6204ZZ	530
MYS-C3.5-804SZU25.80	85*80	25	80	47*14	6005ZZ	530
MYS-C3.5-904SZU20.90	85*90	20	90	47*14	6204ZZ	680
MYS-C3.5-1004SZU25.100	85*100	25	100	47*14	6005ZZ	760
MYS-C3.5-1204SZU25.124	85*120	25	124	47*14	6005ZZ	900

Super Heavy Duty Dual Wheel Casters (2000~5000kg)



Swivel Brake

Model No.	Wheel Material							
		Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-D6-75S113SG-02	Steel	150	75	240	180X145	140X105	20	3000
MY6-D8-75S113SG-02	Steel	200	75	290	180X145	140X105	20	4000
MY6-D10-75S113SG-02	Steel	250	75	330	180X145	140X105	20	5000



Swivel Brake

Model No.	Wheel Material							
		Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-D6-75S16SLU-02	PU aluminum	150	75	240	180X145	140X105	20	2000
MY6-D8-75S16SLU-02	PU aluminum	200	75	290	180X145	140X105	20	3000
MY6-D10-75S16SLU-02	PU aluminum	250	75	330	180X145	140X105	20	4000

Heavy Duty Stainless Steel Casters (250~400kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-100R113SG	MY6-C4-100S113SG	MY6-C4-100T113SG	SUS 304	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-100R113SG	MY6-C5-100S113SG	MY6-C5-100T113SG	SUS 304	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-100R113SG	MY6-C6-100S113SG	MY6-C6-100T113SG	SUS 304	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-100R113SG	MY6-C8-100S113SG	MY6-C8-100T113SG	SUS 304	200	50	241	115X100X6	77-92X67-77	19X11	400

Heavy Duty PU Aluminum Core Casters (250~400kg)



Pu aluminum core single wheel

Model No.	Wheel Material					
		Wheel Dia. (mm)	Tread Width (mm)	Bore Dia & Hub Length (mm)	Bearing (mm)	Load Capacity (kg)
MY5-C4-506SLU20.60	PU aluminum	100	50	20X60	6204X2	250
MY5-C5-506SLU20.60	PU aluminum	125	50	20X60	6204X2	300
MY5-C6-506SLU20.60	PU aluminum	150	50	20X60	6204X2	350
MY5-C8-506SLU20.60	PU aluminum	200	50	20X60	6204X2	400



Fixed



Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
Fixed	Swivel	Swivel Side Brake	Swivel Brake		Wheel Dia. (mm)	Tread Width (mm)	Total Height (mm)	Plate Size (mm)	Hole Spacing (mm)	Hole Size (mm)	Load Capacity (kg)
MY6-C4-50R16SLU	MY6-C4-50S16SLU	MY6-C4-50SB16SLU	MY6-C4-50T16SLU	PU aluminum	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R16SLU	MY6-C5-50S16SLU	MY6-C5-50SB16SLU	MY6-C5-50T16SLU	PU aluminum	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R16SLU	MY6-C6-50S16SLU	MY6-C6-50SB16SLU	MY6-C6-50T16SLU	PU aluminum	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R16SLU	MY6-C8-50S16SLU	MY6-C8-50SB16SLU	MY6-C8-50T16SLU	Pu aluminum	200	50	241	115X100X6	77-92X67-77	19X11	400



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
Stem Swivel	Stem Swivel Brake		Wheel Dia. (mm)	Tread Width (mm)	Total Height (mm)	Thread Size (mm)	Load Capacity (kg)
MY6-C4-50TS16SLU	MY6-C4-50TT16SLU	PU aluminum	100	50	143	20X45	250
MY6-C5-50TS16SLU	MY6-C5-50TT16SLU	PU aluminum	125	50	165	20X45	300
MY6-C6-50TS16SLU	MY6-C6-50TT16SLU	PU aluminum	150	50	190	20X45	350
MY6-C8-50TS16SLU	MY6-C8-50TT16SLU	Pu aluminum	200	50	241	20X45	400

Heavy Duty American Type PU Aluminum Core Casters (300~400kg)



Pu flat aluminum core single wheel

Model No.	Wheel Material					
		Wheel Dia. (mm)	Tread Width (mm)	Bore Dia & Hub Length (mm)	Bearing (mm)	Load Capacity (kg)
MY5-C5-506SLU19.60-04	PU aluminum	125	50	19X60	Roller bearing	300
MY5-C6-506SLU19.60-04	PU aluminum	150	50	19X60	Roller bearing	350
MY5-C8-506SLU19.60-04	PU aluminum	200	50	19X60	Roller bearing	400



Fixed



Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
Fixed	Swivel	Swivel Side Brake	Swivel Brake		Wheel Dia. (mm)	Tread Width (mm)	Total Height (mm)	Plate Size (mm)	Hole Spacing (mm)	Hole Size (mm)	Load Capacity (kg)
MY6-C5-50R16SLU-04	MY6-C5-50S16SLU-04	MY6-C5-50SB16SLU-04	MY6-C5-50S16TLU-04	PU aluminum	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R16SLU-04	MY6-C6-50S16SLU-04	MY6-C6-50S16SBLU-04	MY6-C6-50S16TLU-04	PU aluminum	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R16SLU-04	MY6-C8-50S16SLU-04	MY6-C8-50S16SBLU-04	MY6-C8-50S16TLU-04	PU aluminum	200	50	241	115X100X6	77-92X67-77	19X11	400



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
Stem Swivel	Stem Swivel Brake		Wheel Dia. (mm)	Tread Width (mm)	Total Height (mm)	Thread Size (mm)	Load Capacity (kg)
MY6-C5-50S16STLU-	MY6-C5-50S16TTLU-	PU Aluminum	125	50	165	20X45	300
MY6-C6-50S16STLU-	MY6-C6-50S16TTLU-	PU Aluminum	150	50	190	20X45	350
MY6-C8-50S16STLU-	MY6-C8-50S16TTLU-	PU Aluminum	200	50	241	20X45	400

Heavy Duty Round PU Aluminum Core Casters (250~400kg)



Round Pu aluminum core single wheel

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-506SLU20.60-03	PU aluminum	100	50	20X60	6204X2	250
MY5-C5-506SLU20.60-03	PU aluminum	125	50	20X60	6204X2	300
MY5-C6-506SLU20.60-03	PU aluminum	150	50	20X60	6204X2	350
MY5-C8-506SLU20.60-03	PU aluminum	200	50	20X60	6204X2	400



Fixed



Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
Fixed	Swivel	Swivel Side Brake	Swivel Brake		Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
					(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R16SLU-03	MY6-C4-50S16SLU-03	MY6-C4-50SB16SLU-03	MY6-C4-50T16SLU-03	PU aluminum	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R16SLU-03	MY6-C5-50S16SLU-03	MY6-C5-50SB16SLU-03	MY6-C5-50T16SLU-03	PU aluminum	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R16SLU-03	MY6-C6-50S16SLU-03	MY6-C6-50SB16SLU-03	MY6-C6-50T16SLU-03	PU aluminum	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R16SLU-03	MY6-C8-50S16SLU-03	MY6-C8-50SB16SLU-03	MY6-C8-50T16SLU-03	PU aluminum	200	50	241	115X100X6	77-92X67-77	19X11	400



Stem Swivel Side Brake



Stem Swivel Brake

Model No.		Wheel Material					
Stem Swivel Side Brake	Stem Swivel Brake		Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
			(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50TB16SLU-	MY6-C4-50TT16SLU-	PU Aluminum	100	50	143	20X45	250
MY6-C5-50TB16SLU-	MY6-C5-50TT16SLU-	PU Aluminum	125	50	165	20X45	300
MY6-C6-50TB16SLU-	MY6-C6-50TT16SLU-	PU Aluminum	150	50	190	20X45	350
MY6-C8-50TB16SLU-	MY6-C8-50TT16SLU-	PU Aluminum	200	50	241	20X45	400

American Type Heavy Duty Rubber Aluminum Core Casters (250~400kg)



Rubber aluminum core single wheel

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-503SLX17.56	Rubber Aluminum	100	50	17X56	6203X2	250
MY5-C5-503SLX17.56	Rubber Aluminum	125	50	17X56	6204X2	300
MY5-C6-503SLX17.56	Rubber Aluminum	150	50	17X56	6204X2	350
MY5-C8-503SLX17.56	Rubber Aluminum	200	50	17X56	6204X2	400



Fixed



Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
Fixed	Swivel	Swivel Side Brake	Swivel Brake		Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
					(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R13SLX	MY6-C4-50S13SLX	MY6-C4-50SB13SLX	MY6-C4-50T13SLX	Rubber Aluminum	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R13SLX	MY6-C5-50S13SLX	MY6-C5-50SB13SLX	MY6-C5-50T13SLX	Rubber Aluminum	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R13SLX	MY6-C6-50S13SLX	MY6-C6-50SB13SLX	MY6-C6-50T13SLX	Rubber Aluminum	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R13SLX	MY6-C8-50S13SLX	MY6-C8-50SB13SLX	MY6-C8-50T13SLX	Rubber Aluminum	200	50	241	115X100X6	77-92X67-77	19X11	400



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
Stem Swivel	Stem Swivel Brake		Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
			(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50TS13SLX	MY6-C4-50TT13SLX	Rubber Aluminum	100	50	143	20X45	250
MY6-C5-50TS13SLX	MY6-C5-50TT13SLX	Rubber Aluminum	125	50	165	20X45	300
MY6-C6-50TS13SLX	MY6-C6-50TT13SLX	Rubber Aluminum	150	50	190	20X45	350
MY6-C8-50TS13SLX	MY6-C8-50TT13SLX	Rubber Aluminum	200	50	241	20X45	400

European Type Heavy Duty Pu Aluminum Core Casters (250~400kg)



Pu aluminum core single wheel

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-506SLU20.60	PU aluminum	100	50	20X60	6204X2	250
MY5-C5-506SLU20.60	PU aluminum	125	50	20X60	6204X2	300
MY5-C6-506SLU20.60	PU aluminum	150	50	20X60	6204X2	350
MY5-C8-506SLU20.60	PU aluminum	200	50	20X60	6204X2	400



Fixed



Swivel



Swivel Brake

Model No			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R16SLU-06	MY6-C4-50S16SLU-06	MY6-C4-50T16SLU-06	PU aluminum	100	50	143	135X114X6	105X80	16X11	250
MY6-C5-50R16SLU-06	MY6-C5-50S16SLU-06	MY6-C5-50T16SLU-06	PU aluminum	125	50	165	135X114X6	105X80	16X11	300
MY6-C6-50R16SLU-06	MY6-C6-50S16SLU-06	MY6-C6-50T16SLU-06	PU aluminum	150	50	190	135X114X6	105X80	16X11	350
MY6-C8-50R16SLU-06	MY6-C8-50S16SLU-06	MY6-C8-50T16SLU-06	PU aluminum	200	50	241	135X114X6	105X80	16X11	400

European Type Heavy Duty Rubber Aluminum Core Casters (250~400kg)



Rubber aluminum core single wheel

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-503SLX20.60	Rubber aluminum	100	50	20X60	6204X2	250
MY5-C5-503SLX20.60	Rubber aluminum	125	50	20X60	6204X2	300
MY5-C6-503SLX20.60	Rubber aluminum	150	50	20X60	6204X2	350
MY5-C8-503SLX20.60	Rubber aluminum	200	50	20X60	6204X2	400



Fixed



Swivel








Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R13SLX-06	MY6-C4-50S13SLX-06	MY6-C4-50T13SLX-06	Rubber aluminum	100	50	143	135X114	105X80	16X11	250
MY6-C5-50R13SLX-06	MY6-C5-50S13SLX-06	MY6-C5-50T13SLX-06	Rubber aluminum	125	50	165	135X114	105X80	16X11	300
MY6-C6-50R13SLX-06	MY6-C6-50S13SLX-06	MY6-C6-50T13SLX-06	Rubber aluminum	150	50	190	135X114	105X80	16X11	350
MY6-C8-50R13SLX-06	MY6-C8-50S13SLX-06	MY6-C8-50T13SLX-06	Rubber aluminum	200	50	241	135X114	105X80	16X11	400

European New Type Heavy Duty Rubber Aluminum Core Casters (250~400kg)



Rubber aluminum core single wheel

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MYS-C4-502SLX20.60	Rubber aluminum	100	50	20X60	6204X2	250
MYS-C5-502SLX20.60	Rubber aluminum	125	50	20X60	6204X2	300
MYS-C6-502SLX20.60	Rubber aluminum	150	50	20X60	6204X2	350
MYS-C8-502SLX20.60	Rubber aluminum	200	50	20X60	6204X2	400










Fixed



Swivel



Swivel Brake

Model No			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C5-50R12SLX-06	MY6-C5-50S12SLX-06	MY6-C5-50T12SLX-06	Rubber aluminum	125	50	143	135X110X4	105X80	16X11	250
MY6-C6-50R12SLX-06	MY6-C6-50S12SLX-06	MY6-C6-50T12SLX-06	Rubber aluminum	150	50	165	135X110X4	105X80	16X11	300
MY6-C6.5-50R12SLX-06	MY6-C6.5-50S12SLX-06	MY6-C6.5-50T12SLX-06	Rubber aluminum	160	50	190	135X110X4	105X80	16X11	350
MY6-C8-50R12SLX-06	MY6-C8-50S12SLX-06	MY6-C8-50T12SLX-06	Rubber aluminum	200	50	241	135X110X4	105X80	16X11	400

Heavy Duty PU Iron Casters with Blue Bracket (500~600kg)



Fixed



Swivel

Model No.		Wheel Material							
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-D5-50R11SZU-03	MY6-D5-50S11SZU-03	Pu cast iron	125	50	193	140X110X12	105X75	20X12	500
MY6-D6-50R11SZU-03	MY6-D6-50S11SZU-03	Pu cast iron	150	50	228	140X110X12	105X75	20X12	550
MY6-D8-50R11SZU-03	MY6-D8-50S11SZU-03	Pu cast iron	200	50	284	140X110X12	105X75	20X12	600

Heavy Duty PU Cast Iron Casters (250~400kg)



Pu cast iron core single wheel

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-504SZU17.62	Pu cast iron	100	50	17X62	6203X2	250
MY5-C5-504SZU17.62	Pu cast iron	125	50	17X62	6203X2	300
MY5-C6-504SZU17.62	Pu cast iron	150	50	17X62	6203X2	350
MY5-C8-504SZU17.62	Pu cast iron	200	50	17X62	6203X2	400



Fixed



Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
					Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Side Brake	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R14SZU	MY6-C4-50S14SZU	MY6-C4-50SB14SZU	MY6-C4-50T14SZU	Pu cast iron	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R14SZU	MY6-C5-50S14SZU	MY6-C5-50SB14SZU	MY6-C5-50T14SZU	Pu cast iron	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R14SZU	MY6-C6-50S14SZU	MY6-C6-50SB14SZU	MY6-C6-50T14SZU	Pu cast iron	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R14SZU	MY6-C8-50S14SZU	MY6-C8-50SB14SZU	MY6-C8-50T14SZU	Pu cast iron	200	50	241	115X100X6	77-92X67-77	19X11	400

Korea Type PU Cast Iron Casters (300~450kg)



Cast Iron Crown Surface PU Wheel

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-504SZU19.60-03	PU Cast Iron	100	50	19X60	6203X2	300
MY5-C5-504SZU19.60-03	PU Cast Iron	125	50	19X60	6203X2	350
MY5-C6-504SZU19.60-03	PU Cast Iron	150	50	19X60	6203X2	400
MY5-C8-504SZU19.60-03	PU Cast Iron	200	50	19X60	6203X2	450



Fixed



Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
					Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Side Brake	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R14SGU-03	MY6-C4-50S14SGU-03	MY6-C4-50B14SGU-03	MY6-C4-50T14SGU-03	PU CAST IRON	100	50	143	115X100X6	77-92X67-77	19X11	300
MY6-C5-50R14SGU-03	MY6-C5-50S14SGU-03	MY6-C5-50B14SGU-03	MY6-C5-50T14SGU-03	PU CAST IRON	125	50	165	115X100X6	77-92X67-77	19X11	350
MY6-C6-50R14SGU-03	MY6-C6-50S14SGU-03	MY6-C6-50B14SGU-03	MY6-C6-50T14SGU-03	PU CAST IRON	150	50	190	115X100X6	77-92X67-77	19X11	400
MY6-C8-50R14SGU-03	MY6-C8-50S14SGU-03	MY6-C8-50B14SGU-03	MY6-C8-50T14SGU-03	PU CAST IRON	200	50	241	115X100X6	77-92X67-77	19X11	450

Heavy Duty Hollow Cast Iron Core Rubber Casters (250~400kg)



Rubber Cast Iron core single wheel

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-503GZX19.60-06	Rubber Cast Iron	100	50	19X60	Roller bearing	250
MY5-C5-503GZX19.60-06	Rubber Cast Iron	125	50	19X60	Roller bearing	300
MY5-C6-503GZX19.60-06	Rubber Cast Iron	150	50	19X60	Roller bearing	350
MY5-C8-503GZX19.60-06	Rubber Cast Iron	200	50	19X60	Roller bearing	400



Fixed



Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
					Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Side Brake	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R13SZX-06	MY6-C4-50S13SZX-06	MY6-C4-50SB13SZX-06	MY6-C4-50T13SZX-06	Rubber Cast Iron	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R13SZX-06	MY6-C5-50S13SZX-06	MY6-C5-50SB13SZX-06	MY6-C5-50T13SZX-06	Rubber Cast Iron	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R13SZX-06	MY6-C6-50S13SZX-06	MY6-C6-50SB13SZX-06	MY6-C6-50T13SZX-06	Rubber Cast Iron	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R13SZX-06	MY6-C8-50S13SZX-06	MY6-C8-50SB13SZX-06	MY6-C8-50T13SZX-06	Rubber Cast Iron	200	50	241	115X100X6	77-92X67-77	19X11	400

Korea Type High Elastic Rubber Cast Iron Core Casters (250~400kg)



Fixed










Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
					Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Side Brake	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R12S7X-03	MY6-C4-50S12S7X-03	MY6-C4-50SB12S7X-03	MY6-C4-50T12S7X-03	Elastic Rubber Cast	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R12S7X-03	MY6-C5-50S12S7X-03	MY6-C5-50SB12S7X-03	MY6-C5-50T12S7X-03	Elastic Rubber Cast	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R12S7X-03	MY6-C6-50S12S7X-03	MY6-C6-50SB12S7X-03	MY6-C6-50T12S7X-03	Elastic Rubber Cast	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R12S7X-03	MY6-C8-50S12S7X-03	MY6-C8-50SB12S7X-03	MY6-C8-50T12S7X-03	Elastic Rubber Cast	200	50	241	115X100X6	77-92X67-77	19X11	400

Super Thermal Plastic Rubber PP Core Casters (250~400kg)










Fixed



Swivel



Swivel Brake

Model No.				Wheel Material							
					Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Side Brake	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R12SPX-03	MY6-C4-50S12SPX-03	MY6-C4-50SB12SPX-03	MY6-C4-50T12SPX-03	Super TPR PP core	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R12SPX-03	MY6-C5-50S12SPX-03	MY6-C5-50SB12SPX-03	MY6-C5-50T12SPX-03	Super TPR PP core	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R12SPX-03	MY6-C6-50S12SPX-03	MY6-C6-50SB12SPX-03	MY6-C6-50T12SPX-03	Super TPR PP core	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R12SPX-03	MY6-C8-50S12SPX-03	MY6-C8-50SB12SPX-03	MY6-C8-50T12SPX-03	Super TPR PP core	200	50	241	115X100X6	77-92X67-77	19X11	400

Korea Type High Elastic PU Cast Iron Core Casters (300~450kg)



Fixed



Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
					Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Side Brake	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R15SZU-03	MY6-C4-50S15SZU-03	MY6-C4-50SB15SZU-03	MY6-C4-50T15SZU-03	PU Cast Iron	100	50	143	115X100X6	77-92X67-77	19X11	300
MY6-C5-50R15SZU-03	MY6-C5-50S15SZU-03	MY6-C5-50SB15SZU-03	MY6-C5-50T15SZU-03	PU Cast Iron	125	50	165	115X100X6	77-92X67-77	19X11	350
MY6-C6-50R15SZU-03	MY6-C6-50S15SZU-03	MY6-C6-50SB15SZU-03	MY6-C6-50T15SZU-03	PU Cast Iron	150	50	190	115X100X6	77-92X67-77	19X11	400
MY6-C8-50R15SZU-03	MY6-C8-50S15SZU-03	MY6-C8-50SB15SZU-03	MY6-C8-50T15SZU-03	PU Cast Iron	200	50	241	115X100X6	77-92X67-77	19X11	450

Korea Type PP Core PU Casters (250~400kg)



Fixed



Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
					Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Side Brake	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R14SPU-03	MY6-C4-50S14SPU-03	MY6-C4-50SB14SPU-03	MY6-C4-50T14SPU-03	PU PP	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R14SPU-03	MY6-C5-50S14SPU-03	MY6-C5-50SB14SPU-03	MY6-C5-50T14SPU-03	PU PP	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R14SPU-03	MY6-C6-50S14SPU-03	MY6-C6-50SB14SPU-03	MY6-C6-50T14SPU-03	PU PP	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R14SPU-03	MY6-C8-50S14SPU-03	MY6-C8-50SB14SPU-03	MY6-C8-50T14SPU-03	PU PP	200	50	241	115X100X6	77-92X67-77	19X11	400

European Type Heavy Duty PU PP Core Casters (250~400kg)



PU PP core single wheel

Model No.	Wheel Material	Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-5011SPU15.5 6	PU PP	100	50	15X56	6202X2	250
MY5-C5-5011SPU15.5 6	PU PP	125	50	15X56	6202X2	300
MY5-C6-5011SPU15.5 6	PU PP	150	50	15X56	6202X2	350
MY5-C8-5011SPU15.5 6	PU PP	200	50	15X56	6202X2	400



Fixed



Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
Fixed	Swivel	Side Brake	Swivel Brake		Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
					(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R114SPU	MY6-C4-50S114SPU	MY6-C4-50SB114SPU	MY6-C4-50T114SPU	PU PP	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R114SPU	MY6-C5-50S114SPU	MY6-C5-50SB114SPU	MY6-C5-50T114SPU	PU PP	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R114SPU	MY6-C6-50S114SPU	MY6-C6-50SB114SPU	MY6-C6-50T114SPU	PU PP	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R114SPU	MY6-C8-50S114SPU	MY6-C8-50SB114SPU	MY6-C8-50T114SPU	PU PP	200	50	241	115X100X6	77-92X67-77	19X11	400



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
Stem Swivel	Stem Swivel Brake		Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
			(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50TS114SPU	MY6-C4-50TT114SPU	PU PP	100	50	143	20X45	250
MY6-C5-50TS114SPU	MY6-C5-50TT114SPU	PU PP	125	50	165	20X45	300
MY6-C6-50TS114SPU	MY6-C6-50TT114SPU	PU PP	150	50	190	20X45	350
MY6-C8-50TS114SPU	MY6-C8-50TT114SPU	PU PP	200	50	241	20X45	400

Heavy Duty PP Core PU beacon Casters (250~400kg)



Fixed



Swivel

Model No.				Wheel Material							
Fixed	Swivel	Side Brake	Swivel Brake		Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
					(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R112SPU	MY6-C4-50S112SPU	MY6-C4-50SB112SPU	MY6-C4-50T112SPU	PU PP	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R112SPU	MY6-C5-50S112SPU	MY6-C5-50SB112SPU	MY6-C5-50T112SPU	PU PP	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R112SPU	MY6-C6-50S112SPU	MY6-C6-50SB112SPU	MY6-C6-50T112SPU	PU PP	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R112SPU	MY6-C8-50S112SPU	MY6-C8-50SB112SPU	MY6-C8-50T112SPU	PU PP	200	50	241	115X100X6	77-92X67-77	19X11	400

Heavy Duty White Nylon Casters (250~400kg)



white nylon single wheel

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Bore Dia & Hub Length	Bearing	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY5-C4-50SSN15.56	Nylon	100	50	15X56	6202X2	250
MY5-C5-50SSN15.56	Nylon	125	50	15X56	6202X2	300
MY5-C6-50SSN15.56	Nylon	150	50	15X56	6202X2	350
MY5-C8-50SSN15.56	Nylon	200	50	15X56	6202X2	400

6

SERIES

HEAVY DUTY CASTERS



Fixed



Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
Fixed	Swivel	Swivel Side Brake	Swivel Brake		Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
					(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R15SN	MY6-C4-50S15SN	MY6-C4-50SB15SN	MY6-C4-50T15SN	Nylon	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R15SN	MY6-C5-50S15SN	MY6-C5-50SB15SN	MY6-C5-50T15SN	Nylon	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R15SN	MY6-C6-50S15SN	MY6-C6-50SB15SN	MY6-C6-50T15SN	Nylon	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R15SN	MY6-C8-50S15SN	MY6-C8-50SB15SN	MY6-C8-50T15SN	Nylon	200	50	241	115X100X6	77-92X67-77	19X11	400



Stem Swivel



Stem Swivel Brake

Model No.		Wheel Material					
Stem Swivel	Stem Swivel Brake		Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
			(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50TS15SN	MY6-C4-50TT15SN	Nylon	100	50	142	20X45	250
MY6-C5-50TS15SN	MY6-C5-50TT15SN	Nylon	125	50	164	20X45	300
MY6-C6-50TS15SN	MY6-C6-50TT15SN	Nylon	150	50	194	20X45	350
MY6-C8-50TS15SN	MY6-C8-50TT15SN	Nylon	200	50	240	20X45	400

Heavy Duty Plastic Casters (250~400kg)



Fixed



Swivel



Swivel Side Brake



Swivel Brake

Model No.				Wheel Material							
Fixed	Swivel	Swivel Side Brake	Swivel Brake		Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
					(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R15SP	MY6-C4-50S15SP	MY6-C4-50SB15SP	MY6-C4-50T15SP	PP	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R15SP	MY6-C5-50S15SP	MY6-C5-50SB15SP	MY6-C5-50T15SP	PP	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R15SP	MY6-C6-50S15SP	MY6-C6-50SB15SP	MY6-C6-50T15SP	PP	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R15SP	MY6-C8-50S15SP	MY6-C8-50SB15SP	MY6-C8-50T15SP	PP	200	50	241	115X100X6	77-92X67-77	19X11	400

Heavy Duty Hollow Cast Iron Casters (250~550kg)



Fixed



Swivel



Swivel Brake

Model No.				Wheel Material							
					Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Side Brake	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R12SZ-05	MY6-C4-50S12SZ-05	MY6-C4-50SB12SZ-05	MY6-C4-50T12SZ-05	Cast iron	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R12SZ-05	MY6-C5-50S12SZ-05	MY6-C5-50SB12SZ-05	MY6-C5-50T12SZ-05	Cast iron	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R12SZ-05	MY6-C6-50S12SZ-05	MY6-C6-50SB12SZ-05	MY6-C6-50T12SZ-05	Cast iron	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R12SZ-05	MY6-C8-50S12SZ-05	MY6-C8-50SB12SZ-05	MY6-C8-50T12SZ-05	Cast iron	200	50	241	115X100X6	77-92X67-77	19X11	400

Heavy Duty Solid Cast Iron Wheel Casters (250~550kg)



Fixed



Swivel



Swivel Brake

Model No.				Wheel Material							
					Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Side Brake	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY6-C4-50R12SZ	MY6-C4-50S12SZ	MY6-C4-50SB12SZ	MY6-C4-50T12SZ	Cast iron	100	50	143	115X100X6	77-92X67-77	19X11	250
MY6-C5-50R12SZ	MY6-C5-50S12SZ	MY6-C5-50SB12SZ	MY6-C5-50T12SZ	Cast iron	125	50	165	115X100X6	77-92X67-77	19X11	300
MY6-C6-50R12SZ	MY6-C6-50S12SZ	MY6-C6-50SB12SZ	MY6-C6-50T12SZ	Cast iron	150	50	190	115X100X6	77-92X67-77	19X11	350
MY6-C8-50R12SZ	MY6-C8-50S12SZ	MY6-C8-50SB12SZ	MY6-C8-50T12SZ	Cast iron	200	50	241	115X100X6	77-92X67-77	19X11	400

High Temperature Resistant Glass Fiber Casters (250~400kg)



Fixed



Swivel



Swivel brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY7-C4-50R115GH	MY7-C4-50S115GH	MY7-C4-50T115GH	Glass fiber	100	50	143	115X100X6	77-92X67-77	19X11	250
MY7-C5-50R115GH	MY7-C5-50S115GH	MY7-C5-50T115GH	Glass fiber	125	50	165	115X100X6	77-92X67-77	19X11	300
MY7-C6-50R115GH	MY7-C6-50S115GH	MY7-C6-50T115GH	Glass fiber	150	50	190	115X100X6	77-92X67-77	19X11	350
MY7-C8-50R115GH	MY7-C8-50S115GH	MY7-C8-50T115GH	Glass fiber	200	50	241	115X100X6	77-92X67-77	19X11	400

Rubber Aluminum Trash Container Casters (200~250kg)



Swivel



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY7-C6.5-50S13GLX	MY7-C6.5-50T13GLX	Rubber pp	160	40	195	135X110X4	105X78	13.5X11.5	250
MY7-C8-50S13GLX	MY7-C8-50T13GLX	Rubber pp	200	50	245	135X110X4	105X78	13.5X11.5	300

Yellow Bracket Rubber Trash Container Casters (200~250kg)



Swivel



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY7-C6.5-50S13GPX-07	MY7-C6.5-50S13GPX-07	Rubber pp	160	40	195	135X110X4	105X78	13.5X11.5	200
MY7-C8-50S13GPX-07	MY7-C8-50S13GPX-07	Rubber pp	200	50	245	135X110X4	105X78	13.5X11.5	250

Rubber Plastic Core Trash Container Casters (200~250kg)



Swivel



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY7-C6.5-50S13GPX	MY7-C6.5-50S13GPX	Rubber pp	160	40	195	135X110X4	105X78	13.5X11.5	200
MY7-C8-50S13GPX	MY7-C8-50S13GPX	Rubber pp	200	50	245	135X110X4	105X78	13.5X11.5	250

Rubber Steel Rim Trash Container Casters (200~250kg)



Swivel



Swivel Brake

Model No.		Wheel Material							
			Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY7-C6.5-50S13GRX	MY7-C6.5-50S13GRX	Rubber steel	160	40	195	135X110X4	105X78	13.5X11.5	200
MY7-C8-50S13GRX	MY7-C8-50S13GRX	Rubber steel	200	50	245	135X110X4	105X78	13.5X11.5	250

Low Profile Heavy Duty Casters (300~500kg)



Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY7-C2-38R73LN	MY7-C2-38S73LN	MY7-C2-38T73LN	Nylon	50	38	79	84X84X5	64X64	8X16	300
MY7-C2.5-46R73LN	MY7-C2.5-46S73LN	MY7-C2.5-46T73LN	Nylon	65	46	95	100X100X5	64X64	8X16	400
MY7-C3-46R73LN	MY7-C3-46S73LN	MY7-C3-46T73LN	Nylon	75	46	104	100X100X5	64X64	8X16	500



Stem Swivel




Stem Swivel Brake

Model No.		Wheel Material					
			Wheel Dia. (mm)	Tread Width (mm)	Total Height (mm)	Thread Size (mm)	Load Capacity (kg)
Fixed	Swivel						
MY7-C2-38TS73LN	MY7-C2-38TT73LN	Nylon	50	38	79	12X25	300
MY7-C2.5-46TS73LN	MY7-C2.5-46TT73LN	Nylon	65	46	95	12X25	400
MY7-C3-46TS73LN	MY7-C3-46TT73LN	Nylon	75	46	104	12X25	500

Hard Rubber Spring Loaded Gate Casters (50~130kg)



Swivel



Model No.	Wheel Material					
		Wheel Dia. (mm)	Tread Width (mm)	Stem Height (mm)	Thread Size (mm)	Load Capacity (kg)
MY7-B2-22S13LB	Hard rubber	50	22	72	25X72	50
MY7-B3-22S13LB	Hard rubber	75	22	72	25X72	65
MY7-B4-25S13LB	Hard rubber	100	25	153	25X153	80
MY7-B5-25S13LB	Hard rubber	125	25	153	25X153	100

Heavy Duty Scaffolding Casters (350~400kg)



Stem Swivel



Stem Swivel Rear Brake

Model No.		Wheel Material					
			Wheel Dia. (mm)	Tread Width (mm)	Total Height (mm)	Thread Size (mm)	Load Capacity (kg)
Solid Stem Swivel	Solid Stem Swivel Brake						
MY7-C6-50RS14SZU	MY7-C6-50RT14SZU	PU cast iron	150	50	190	35X100	350
MY7-C8-50RS14SZU	MY7-C8-50RT14SZU	PU cast iron	200	50	235	35X100	400






Elastic Rubber Scaffolding Casters (350~400kg)



Stem Swivel








Stem Swivel Rear Brake

Model No.		Wheel Material					
			Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
Solid Stem Swivel	Solid Stem Swivel Brake		(mm)	(mm)	(mm)	(mm)	(kg)
MY7-C6-50RS13SZX	MY7-C6-50RT13SZX	Rubber cast iron	150	50	190	35X100	350
MY7-C8-50RS13SZX	MY7-C8-50RT13SZX	Rubber cast iron	200	50	235	35X100	400

PU PP Core Scaffolding Casters (350~400kg)










Stem Swivel Double Brake

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY7-C6-50RT114SNU	PU nylon core	150	50	190	35X100	350
MY7-C8-50RT114SNU	PU nylon core	200	50	235	35X100	400

Height Adjustable Leveling Casters (50~1500kg)



GD-F series

Model No.	Wheel Material							
		Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY7-GD-40F	Nylon	42	20	71	55X55	42X42	6.5	50
MY7-GD-60F	Nylon	50	25	82	73X73	58X58	7	250
MY7-GD-80F	Nylon	63	30	103	92X92	70X70	9	500
MY7-GD-100F	Nylon	75	30	120	92X92	70X70	9	750
MY7-GD-120F	Nylon	75	30	120	95X95	70X70	11	1000
MY7-GD-150F	Nylon	90	55	132	100X100	70X70	13	1500

PNEUMATIC WHEELS



PNEUMATIC PR0013 3.00-8



PNEUMATIC PR012 3.50-8



PNEUMATIC PR011 10-inch



PNEUMATIC PR010 10-inch



PNEUMATIC PR009 3.00-10



PNEUMATIC PR008 4.00-6



PNEUMATIC PR007 8-inch



PNEUMATIC PR006 3.50-8



PNEUMATIC PR005 16x6.50-8



PNEUMATIC PR004 4.00-4



PNEUMATIC PR003 4.00-8



PNEUMATIC PR002 3.00-4



PNEUMATIC PR001 4.00-6



PNEUMATIC PR1805
18"x8.50-8



PNEUMATIC PR1803
18"x8.50-8



PNEUMATIC PR1802
18"x8.50-8



PNEUMATIC PR1801
18"x8.50-8



PNEUMATIC PR1672
16"x7.50-8



PNEUMATIC PR1670
16"x7.50-8



PNEUMATIC PR1660
16"x6.50-8



PNEUMATIC PR1657
16"x6.50-8



PNEUMATIC PR1650-5
16"x6.50-8



PNEUMATIC PR1650-4
16"x6.50-8



PNEUMATIC PR1650-3
16"x6.50-8



PNEUMATIC PR1650-2
16"x6.50-8



PNEUMATIC PR1650-1
16"x6.50-8



PNEUMATIC PR1641
16"x4.80/4.00-8



PNEUMATIC PR1640
16"x4.80/4.00-8



PNEUMATIC PR1636
16"x4.80/4.00-8



PNEUMATIC PR1635
16"x4.80/4.00-8

PNEUMATIC WHEELS


PNEUMATIC PR1633
16"x4.80/4.00-8



PNEUMATIC PR1632
16"x4.80/4.00-8



PNEUMATIC PR1630-3
16"x4.80/4.00-8



PNEUMATIC PR1630-2
16"x4.80/4.00-8



PNEUMATIC PR1630-1
16"x4.80/4.00-8



PNEUMATIC PR1629-3
16"x4.80/4.00-8



PNEUMATIC PR1629-2
16"x4.80/4.00-8



PNEUMATIC PR1629-1
16"x4.80/4.00-8



PNEUMATIC PR1628
16"x4.80/4.00-8



PNEUMATIC PR1627
16"x4.80/4.00-8



PNEUMATIC PR1626-3
16"x4.80/4.00-8



PNEUMATIC PR1626-2
16"x4.80/4.00-8



PNEUMATIC PR1625-2
16"x4.80/4.00-8



PNEUMATIC PR1625-1
16"x4.80/4.00-8



PNEUMATIC PR1625-0
16"x4.80/4.00-8



PNEUMATIC PR1624
16"x4.80/4.00-8



PNEUMATIC PR1621-5
16"x4.80/4.00-8



PNEUMATIC PR1621-4
16"x4.80/4.00-8



PNEUMATIC PR1621-3
16"x4.80/4.00-8



PNEUMATIC PR1621-2
16"x4.80/4.00-8



PNEUMATIC PR1621-1
16"x4.80/4.00-8



PNEUMATIC PR1620-7
16"x4.80/4.00-8



PNEUMATIC PR1620-6
16"x4.80/4.00-8



PNEUMATIC PR1620-5
16"x4.80/4.00-8



PNEUMATIC PR1620-4
16"x4.80/4.00-8



PNEUMATIC PR1620-3
16"x4.80/4.00-8



PNEUMATIC PR1620-2
16"x4.80/4.00-8



PNEUMATIC PR1620-1
16"x4.80/4.00-8



PNEUMATIC PR1620-0
16"x4.80/4.00-8



PNEUMATIC PR1619
16"x4.80/4.00-8

PNEUMATIC WHEELS



PNEUMATIC PR1618
16"x4.80/4.00-8



PNEUMATIC PR1614
16"x4.80/4.00-8



PNEUMATIC PR1613-1
16"x4.80/4.00-8



PNEUMATIC PR1613-0
16"x4.80/4.00-8



PNEUMATIC PR1613-2
16"x4.80/4.00-8



PNEUMATIC PR1612
16"x4.80/4.00-8



PNEUMATIC PR1611
16"x4.80/4.00-8



PNEUMATIC PR1607
16"x4.80/4.00-8



PNEUMATIC PR1606
16"x4.80/4.00-



PNEUMATIC PR1605
16"x4.80/4.00-8



PNEUMATIC PR1604
16"x4.80/4.00-8



PNEUMATIC PR1603
16"x4.80/4.00-8



PNEUMATIC PR1601-7
16"x4.80/4.00-8



PNEUMATIC PR1601-6
16"x4.80/4.00-8



PNEUMATIC PR1601-5
16"x4.80/4.00-8



PNEUMATIC PR1601-4
16"x4.80/4.00-8



PNEUMATIC PR1601-3
16"x4.80/4.00-8



PNEUMATIC PR1601-2
16"x4.80/4.00-8



PNEUMATIC PR1601-1
16"x4.80/4.00-8



PNEUMATIC PR1600
16"x4.00-7



PNEUMATIC PR1506
15"x6.50-6



PNEUMATIC PR1505-2
15"x6.00-6



PNEUMATIC PR1505-1
15"x6.00-6



PNEUMATIC PR1501
15"x6.00-6



PNEUMATIC PR1431
14"x3.50-8



PNEUMATIC PR1430-2
14"x3.50-8



PNEUMATIC PR1430-1
14"x3.50-8



PNEUMATIC PR1429
14"x3.50-8



PNEUMATIC PR1424
14"x3.50-8



PNEUMATIC PR1421
14"x3.50-8

PNEUMATIC WHEELS



PNEUMATIC PR1420
14"x3.50-8



PNEUMATIC PR1418-2
14"x3.50-8



PNEUMATIC PR1418-1
14"x3.50-8



PNEUMATIC PR1415
14"x3.50-8



PNEUMATIC PR1414-4
14"x3.50-8



PNEUMATIC PR1414-3
14"x3.50-8



PNEUMATIC PR1414-2
14"x3.50-8



PNEUMATIC PR1414-1
14"x3.50-8



PNEUMATIC PR1412-3
14"x3.50-8



PNEUMATIC PR1412-2
14"x3.50-8



PNEUMATIC PR1412-1
14"x3.50-8



PNEUMATIC PR1411
14"x3.50-8



PNEUMATIC PR1410-2
14"x3.50-8



PNEUMATIC PR1410-1
14"x3.50-8



PNEUMATIC PR1409-3
14"x3.50-8



PNEUMATIC PR1409-2
14"x3.50-8



PNEUMATIC PR1409-1
14"x3.50-8



PNEUMATIC PR1408-3
14"x3.50-8



PNEUMATIC PR1408-2
14"x3.50-8



PNEUMATIC PR1408-1
14"x3.50-8



PNEUMATIC PR1407-6
14"x3.50-8



PNEUMATIC PR1407-5
14"x3.50-8



PNEUMATIC PR1407-4
14"x3.50-8



PNEUMATIC PR1407-3
14"x3.50-8



PNEUMATIC PR1407-2
14"x3.50-8



PNEUMATIC PR1407-1
14"x3.50-8



PNEUMATIC PR1406
14"x3.50-8



PNEUMATIC PR1405-2
14"x3.50-8



PNEUMATIC PR1405-1
14"x3.50-8



PNEUMATIC PR1402
14"x3.50-8

PNEUMATIC WHEELS



PNEUMATIC PR1401
14"x3.50-8



PNEUMATIC PR1357
13"x6.50-6



PNEUMATIC PR1356
13"x5.00-6



PNEUMATIC PR1354
13"x5.00-6



PNEUMATIC PR1352
13"x5.00-6



PNEUMATIC PR1351
13"x5.00-6



PNEUMATIC PR1350-3
13"x5.00-6



PNEUMATIC PR1350-2
13"x5.00-6



PNEUMATIC PR1350-1
13"x5.00-6



PNEUMATIC PR1327-3
13"x4.00-6



PNEUMATIC PR1327-2
13"x4.00-6



PNEUMATIC PR1327-1
13"x4.00-6



PNEUMATIC PR1326
13"x4.00-6



PNEUMATIC PR1325
13"x4.00-6



PNEUMATIC PR1324
13"x4.00-6



PNEUMATIC PR1323
13"x4.00-6



PNEUMATIC PR1322
13"x4.00-6



PNEUMATIC PR1322
13"x4.00-6



PNEUMATIC PR1321
13"x4.00-6



PNEUMATIC PR1320-2
13"x4.00-6



PNEUMATIC PR1320-2
13"x4.00-6



PNEUMATIC PR1320-1
13"x4.00-6



PNEUMATIC PR1315-1
13"x3.50-7



PNEUMATIC PR1307
13"x3.00-8



PNEUMATIC PR1306
13"x3.00-8



PNEUMATIC PR1303-6
13"x3.00 3.25-8



PNEUMATIC PR1303-5
13"x3.00 3.25-8



PNEUMATIC PR1303-5
13"x3.00 3.25-8



PNEUMATIC PR1303-4
13"x3.00 3.25-8



PNEUMATIC PR1303-3
13"x3.00 3.25-8

PNEUMATIC WHEELS



PNEUMATIC PR1303-2
13"x3.00 3.25-8



PNEUMATIC PR1303-1
13"x3.00 3.25-8



PNEUMATIC PR1302
13"x3.25-8



PNEUMATIC PR1301
13"x3.25-8



PNEUMATIC PR1227
12"x3.50-6



PNEUMATIC PR1226
12"x3.50-6



PNEUMATIC PR1225
12"x3.50-6



PNEUMATIC PR1224
12"x3.50-6



PNEUMATIC PR1223
12"x3.50-6



PNEUMATIC PR1222
12"x3.50-6



PNEUMATIC PR1221
12"x3.50-6



PNEUMATIC PR1210
12"x3.50-5



PNEUMATIC PR1208
12"x3.50-5



PNEUMATIC PR1207
12"x3.50-5



PNEUMATIC PR1206
12"x3.50-5



PNEUMATIC PR1205
12"x3.50-5



PNEUMATIC PR1204-1
12"x3.50-5



PNEUMATIC PR1203
12"x3.50-5



PNEUMATIC PR1202 3.50-5



PNEUMATIC PR1201-2
12"x3.50-5



PNEUMATIC PR1201-1
12"x3.50-5



PNEUMATIC PR1160
11"x6.00-5



PNEUMATIC PR1130
11"x4.00-5



PNEUMATIC PR1121-2
11"x4.00-5



PNEUMATIC PR1121-1
11"x4.00-5



PNEUMATIC PR1120
11"x4.00-5



PNEUMATIC PR1110 4.00-4



PNEUMATIC PR1104
11"x4.00-4



PNEUMATIC PR1050
10"x3.50-4



PNEUMATIC PR1049
10"x4.10/3.50-4

PNEUMATIC WHEELS



PNEUMATIC PR1048
10"x4.10/3.50-4



PNEUMATIC PR1047-3
10"x4.10/3.50-4



PNEUMATIC PR1047-2
10"x4.10/3.50-4



PNEUMATIC PR1047-1
10"x4.10/3.50-4



PNEUMATIC PR1046
10"x4.10/3.50-4



PNEUMATIC PR1045-2
10"x4.10/3.50-4



PNEUMATIC PR1045-1
10"x4.10/3.50-4



PNEUMATIC PR1044-3
10"x4.10/3.50-4



PNEUMATIC PR1044-1
10"x4.10/3.50-4



PNEUMATIC PR1043
10"x4.10/3.50-4



PNEUMATIC PR1042
10"x4.10/3.50-4



PNEUMATIC PR1041-5
10"x4.10/3.50-4



PNEUMATIC PR1041-4
10"x4.10/3.50-4



PNEUMATIC PR1041-2
10"x4.10/3.50-4



PNEUMATIC PR1041-3
10"x4.10/3.50-4



PNEUMATIC PR1041-1
10"x4.10/3.50-4



PNEUMATIC PR1040-9
10"x4.10/3.50-4



PNEUMATIC PR1040-8
10"x4.10/3.50-4



PNEUMATIC PR1040-6
10"x4.10/3.50-4



PNEUMATIC PR1040-5
10"x4.10/3.50-4



PNEUMATIC PR1040-4
10"x4.10/3.50-4



PNEUMATIC PR1040-3
10"x4.10/3.50-4



PNEUMATIC PR1040-2
10"x4.10/3.50-4



PNEUMATIC PR1040-1
10"x4.10/3.50-4



PNEUMATIC PR1035 3.00-4



PNEUMATIC PR1034-2 3.00-4



PNEUMATIC PR1032 3.00-4



PNEUMATIC PR1031 3.00-4



PNEUMATIC PR1028 3.00-4(260x85)



PNEUMATIC PR1026 3.00-4

PNEUMATIC WHEELS


PNEUMATIC PR1025 3.00-4



PNEUMATIC PR1023-6 3.00-4



PNEUMATIC PR1023-5 3.00-4



PNEUMATIC PR1023-4 3.00-4



PNEUMATIC PR1023-3 3.00-4(260X85)



PNEUMATIC PR1023-2 3.00-4(260X85)



PNEUMATIC PR1023-1 3.00-4(260X85)



PNEUMATIC PR1022 260X85



PNEUMATIC PR1021 3.00-4



PNEUMATIC PR1020 3.00-4



PNEUMATIC PR1013 10X3



PNEUMATIC PR1012 10"x2.5



PNEUMATIC PR1011 10"x2.5

PNEUMATIC PR1008
10"x2.125

PNEUMATIC PR1005 10"x2



PNEUMATIC PR1003 10"x2



PNEUMATIC PR1002 10"x2

PNEUMATIC PR0842
2.80/2.50-4PNEUMATIC PR0841
8"x2.80/2.50-4PNEUMATIC PR0839
8"x2.80/2.50-4PNEUMATIC PR0838
8"x2.80/2.50-4PNEUMATIC PR0836
8"x2.80/2.50-4PNEUMATIC PR0833
8"x2.80/2.50-4PNEUMATIC PR0833-5
8"x2.80/2.50-4

PNEUMATIC PR0501 5"x1.5



PNEUMATIC PR0601 6"x2



PNEUMATIC PR0602 6"x2



PNEUMATIC PR0603 6"x2



PNEUMATIC PR0604 6"x1.25



PNEUMATIC PR0605 6"x2

PNEUMATIC WHEELS



PNEUMATIC PR0607 6"x2



PNEUMATIC PR0608 6"x2



PNEUMATIC PR0609 6"x2



PNEUMATIC PR0610 6"x2



PNEUMATIC PR0612 6"x1.25



PNEUMATIC PR0613 6"x1.25



PNEUMATIC PR0613-3 6"x2



PNEUMATIC PR0701 7x1.75



PNEUMATIC PR0702 7x1.75



PNEUMATIC PR0703 175



PNEUMATIC PR0704 175



PNEUMATIC PR0705 175



PNEUMATIC PR0706 7x1.75



PNEUMATIC PR0707 7x1.75



PNEUMATIC PR0801 200x50



PNEUMATIC PR0802 200x50



PNEUMATIC PR0803 200x50



PNEUMATIC PR0804 200x50



PNEUMATIC PR0805 200x50



PNEUMATIC PR0807 200x50



PNEUMATIC PR0808 200x50



PNEUMATIC PR0810 200x50



PNEUMATIC PR0812 200x50



PNEUMATIC PR0813 200x50



PNEUMATIC PR0814 200x50



PNEUMATIC PR0816 200x50



PNEUMATIC PR0817 200x50



PNEUMATIC PR0820 8"x1.25



PNEUMATIC PR0830
8"x2.80/2.50-4



PNEUMATIC PR0831
8"x2.80/2.50-4

PU FOAM WHEELS



PU WHEEL PU005 3.20-8



PU WHEEL PU004 3.00-8



PU WHEEL PU003
3.50/3.25/3.00-8



PU WHEEL PU002 3.00-4



PU WHEEL PU001 8x1.75



PU WHEEL PU0601-1 6"x2



PU WHEEL PU0601-2 6"x2



PU WHEEL PU0603-1
6"x1.25(150x30)



PU WHEEL PU0603-2
6"x1.25(150x30)



PU WHEEL PU0604-1 6"x2



PU WHEEL PU0604-2 6"x2



PU WHEEL PU0605 6"x2



PU WHEEL PU0606 6"x2



PU WHEEL PU0607 6"x1.5



PU WHEEL PU0608 6"x1.5



PU WHEEL PU0701 7"x1.25



PU WHEEL PU0702 7"x1.5



PU WHEEL PU0703
7"x1.75(175x45)



PU WHEEL PU0704 7"x2



PU WHEEL PU0705 7"x2



PU WHEEL PU0801
8"x2.80/2.50-4



PU WHEEL PU0802-1
8"x2.80/2.50-4



PU WHEEL PU0802-2
8"x2.80/2.50-4



PU WHEEL PU0802-3
8"x2.80/2.50-4



PU WHEEL PU0802-4
8"x2.80/2.50-4



PU WHEEL PU0803
8"x2.80/2.50-4



PU WHEEL PU0805 8"x3



PU WHEEL PU0806
8"x2.80/2.50-4



PU WHEEL PU807
8"x2.80/2.50-4



PU WHEEL PU0808
8"x2.80/2.50-4

PU FOAM WHEELS



PU WHEEL PU0809-1
8"x2(200x50)



PU WHEEL PU0809-2
8"x2(200/50-105)



PU WHEEL PU0809-3
8"x2(200x50)



PU WHEEL PU0810 8"x3.5



PU WHEEL PU0811
8"x2.80/2.50-4



PPU WHEEL PU0812
8"x2.80/2.50-4



PU WHEEL PU0812
8"x2.80/2.50-4



PU WHEEL PU0815-1 8"x2



PU WHEEL PU0815-2 8"x2



PU WHEEL PU0816 8"x2



PU WHEEL PU817
8"x2.80/2.50-4



PU WHEEL PU0901-1
9"x3.50-4



PU WHEEL PU0901-2
9"x3.50-4



PU WHEEL PU0902 9"x3.50-4



PU WHEEL PU0903 9"x3.50-4



PU WHEEL PU1000 10"x2



PU WHEEL PU1001-1
10"x3.00-4



PU WHEEL PU1001-2
10"x3.00-4



PU WHEEL PU1001-3
10"x3.00-4



PU WHEEL PU1001-4
10"x3.00-4



PU WHEEL PU1001-5
10"x3.00-4



PU WHEEL PU1001-6
10"x3.00-4



PU WHEEL PU1001-7
10"x3.00-4



PU WHEEL PU1001-8
10"x3.00-4



PU WHEEL PU1002 10"x3.00-4(260x85)



PU WHEEL PU1004 10"x3.00-4



PU WHEEL PU1005 10"x3



PU WHEEL PU1006 10"x3



PU WHEEL PU1007 10"x3(260x85)



PU WHEEL PU1008 10"x3.00-4

PU FOAM WHEELS



PU WHEEL PU1010 10''x3.00-4



PU WHEEL PU1014 10''x3(260X85)



PU WHEEL PU1015 10''x3(260X85)



PU WHEEL PU1019 10''x3.00-4



PU WHEEL PU1030-1 10''x4.10/3.50-4



PU WHEEL PU1030-2 10''x4.10/3.50-4



PU WHEEL PU1030-3 10''x4.10/3.50-4



PU WHEEL PU1030-4 10''x4.10/3.50-4



PU WHEEL PU1030-5 10''x4.10/3.50-4



PU WHEEL PU1030-6 10''x4.10/3.50-4



PU WHEEL PU1031 10''x4.10/3.50-4



PU WHEEL PU1032-1 10''x4.10/3.50-4



PU WHEEL PU1032-2 10''x4.10/3.50-4



PU WHEEL PU1032-3 10''x4.10/3.50-4



PU WHEEL PU1032-4 10''x4.10/3.50-4



PU WHEEL PU1032-5 10''x4.10/3.50-4



PU WHEEL PU1032-6 10''x4.10/3.50-4



PU WHEEL PU1035-1 10''x4.10/3.50-4



PU WHEEL PU1035-2 10''x4.10/3.50-4



PU WHEEL PU1035-3 10''x4.10/3.50-4



PU WHEEL PU1040-1 10''x4.10/3.50-4



PU WHEEL PU1040-2 10''x4.10/3.50-4



PU WHEEL PU1040-3 10''x4.10/3.50-4



PU WHEEL PU1041 10''x4.10/3.50-4



PU WHEEL PU1042-0 10''x4.10/3.50-4



PU WHEEL PU1042-1 10''x4.10/3.50-4



PU WHEEL PU1042-2 10''x4.10/3.50-4



PU WHEEL PU1042-3 10''x4.10/3.50-4



PU WHEEL PU1043 10''x4.10/3.50-4



PU WHEEL PU1044 10''x4.10/3.50-4

PU FOAM WHEELS



PU WHEEL PU1046
10"x4.10/3.50-4



PU WHEEL PU1047
10"x4.10/3.50-4



PU WHEEL PU1049
10"x4.10/3.50-4



PU WHEEL PU1050
10"x4.10/3.50-4



PU WHEEL PU1051-1
10"x4.10/3.50-4



PU WHEEL PU1051-2
10"x4.10/3.50-4



PU WHEEL PU1060 10"x3.00-6



PU WHEEL PU1101-1
11"x4.00-4



PU WHEEL PU1101-2
11"x4.00-4



PU WHEEL PU1102 11"x4.00-4



PU WHEEL PU1103 11"x4.00-4



PU WHEEL PU1121 11"x4.00-5



PU WHEEL PU1203
12"x4.10/3.50-5



PU WHEEL PU1203
12"x4.10/3.50-5



PU WHEEL PU1204
12"x4.10/3.50-5



PU WHEEL PU1205
12"x4.10/3.50-5



PU WHEEL PU1207
12"x4.10/3.50-5



PU WHEEL PU1230
12"x4.10/3.50-6



PU WHEEL PU1231
12"x4.10/3.50-6



PU WHEEL PU1231-2
12"x4.10/3.50-6



PU WHEEL PU1232
12"x4.10/3.50-6



PU WHEEL PU1234
12"x4.10/3.50-6



PU WHEEL PU1235-1
12"x4.10/3.50-6



PU WHEEL PU1235-2
12"x4.10/3.50-6



PU WHEEL PU1236
12"x4.10/3.50-6



PU WHEEL PU1260 12"



PU WHEEL PU1261 12"



PU WHEEL PU1264 12"



PU WHEEL PU1270-1
12.5"x2.25"



PU WHEEL PU1270-2
12.5"x2.25"

PU FOAM WHEELS



PU WHEEL PU1303-0
13"x3.00-8(13x3)



PU WHEEL PU1303-1
13"x3.00-8(13x3)



PU WHEEL PU1303-2
13"x3.00-8(13x3)



PU WHEEL PU1303-3
13"x3.00-8(13x3)



PU WHEEL PU1303-4
13"x3.00-8(13x3)



PU WHEEL PU1303-5
13"x3.00-8(13x3)



PU WHEEL PU1307-1
13"x3.25-8



PU WHEEL PU1307-2
13"x3.25-8



PU WHEEL PU1308 13"x3.25-8



PU WHEEL PU1309 13"x3.25-8



PU WHEEL PU1310
13"x3.25/3.00-8



PU WHEEL PU1311 13"x3.25-8



PU WHEEL PU1335 13"x3.50-7



PU WHEEL PU1340-1
13"x4.00-6



PU WHEEL PU1340-2
13"x4.00-6



PU WHEEL PU1340-3
13"x4.00-6



PU WHEEL PU1340-4
13"x4.00-6



PU WHEEL PU1340-5
13"x4.00-6



PU WHEEL PU1340-6
13"x4.00-6



PU WHEEL PU1340-7
13"x4.00-6



PU WHEEL PU1340-8
13"x4.00-6



PU WHEEL PU1341-1
13"x4.00-6



PU WHEEL PU1341-2
13"x4.00-6



PU WHEEL PU1342-1
13"x4.00-6



PU WHEEL PU1342-2
13"x4.00-6



PU WHEEL PU1344 13"x4.00-6



PU WHEEL PU1360-1
13"x5.00-6



PU WHEEL PU1360-2
13"x5.00-6



PU WHEEL PU1360-3
13"x5.00-6



PU WHEEL PU1363 13"x5.00-6

PU FOAM WHEELS



PU WHEEL PU1364 13"x5.00-6



PU WHEEL PU1370-1 13"x6.50-6



PU WHEEL PU1370-2 13"x6.50-6



PU WHEEL PU1372 13"x6.50-6



PU WHEEL PU1401-1 14"x3.50-8



PU WHEEL PU1401-2 14"x3.50-8



PU WHEEL PU1401-3 14"x3.50-8



PU WHEEL PU1401-4 14"x3.50-8



PU WHEEL PU1402 14"x3.50-8



PU WHEEL PU1403-1 14"x3.50-8



PU WHEEL PU1403-2 14"x3.50-8



PU WHEEL PU1403-3 14"x3.50-8



PU WHEEL PU1403-4 14"x3.50-8



PU WHEEL PU1403-5 14"x3.50-8



PU WHEEL PU1403-7 14"x3.50-8



PU WHEEL PU1403-8 14"x3.50-8



PU WHEEL PU1404 14"x3.50-8



PU WHEEL PU1405-1 14"x3.50-8



PU WHEEL PU1405-2 14"x3.50-8



PU WHEEL PU1405-3 14"x3.50-8



PU WHEEL PU1405-4 14"x3.50-8



PU WHEEL PU1406-1 14"x3.50-8



PU WHEEL PU1406-2 14"x3.50-8



PU WHEEL PU1406-3 14"x3.50-8



PU WHEEL PU1407 14"x3.50-8



PU WHEEL PU1408-1 14"x3.50-8



PU WHEEL PU1408-2 14"x3.50-8



PU WHEEL PU1409 14"x3.50-8



PU WHEEL PU1410 14"x3.50-8



PU WHEEL PU1430 14"x3.50-7

PU FOAM WHEELS



PU WHEEL PU1502 15"x6.50-6



PU WHEEL PU1503 15"x6.00-6



PU WHEEL PU1601-1 16"x4.80/4.00-8



PU WHEEL PU1601-2 16"x4.80/4.00-8



PU WHEEL PU1601-3 16"x4.80/4.00-8



PU WHEEL PU1602-1 16"x4.80/4.00-8



PU WHEEL PU1602-2 16"x4.80/4.00-8



PU WHEEL PU1602-3 16"x4.80/4.00-8



PU WHEEL PU1603 16"x4.80/4.00-8



PU WHEEL PU1604 16"x4.80/4.00-8



PU WHEEL PU1606-1 16"x4.80/4.00-8



PU WHEEL PU1606-2 16"x4.80/4.00-8



PU WHEEL PU1606-3 16"x4.80/4.00-8



PU WHEEL PU1606-4 16"x4.80/4.00-8



PU WHEEL PU1606-5 16"x4.80/4.00-8



PU WHEEL PU1606-6 16"x4.80/4.00-8



PU WHEEL PU1606-7 16"x4.80/4.00-8



PU WHEEL PU1606-8 16"x4.80/4.00-8



PU WHEEL PU1608 16"x4.80/4.00-8



PU WHEEL PU1610-1 16"x4.80-8/4.00-8



PU WHEEL PU1610-2 16"x4.80-8/4.00-8



PU WHEEL PU1610-3 16"x4.80-8/4.00-8



PU WHEEL PU1611-1 16"x4.80/4.00-8



PU WHEEL PU1611-2 16"x4.80/4.00-8



PU WHEEL PU1611-3 16"x4.80/4.00-8



PU WHEEL PU1612 16"x4.80/4.00-8



PU WHEEL PU1613 16"x4.80/4.00-8



PU WHEEL PU1613-2 16"x4.80/4.00-8



PU WHEEL PU1613-3 16"x4.80/4.00-8



PU WHEEL PU1616 16"x4.00-8

SOLID RUBBER WHEELS



SOLID RUBBER SR0401 4x1



SOLID RUBBER SR0501-1
5x1.5 125/37.5-50



SOLID RUBBER SR0501-2
5x1.5 125/37.5-50



SOLID RUBBER SR0502
5x1.5



SOLID RUBBER SR0503-1
5x1.5



SOLID RUBBER SR0503-2
5x1.5



SOLID RUBBER SR0503-3
5x1.5



SOLID RUBBER SR0504-1
5x1.5



SOLID RUBBER SR0504-2
5x1.5



SOLID RUBBER SR0504-3
5x1.5



SOLID RUBBER SR0525
5.5x2



SOLID RUBBER SR0526
5.5x2



SOLID RUBBER SR0601
140x32



SOLID RUBBER SR0603
6x1.4



SOLID RUBBER SR0604
6x1.5



SOLID RUBBER SR0605-1
6x1.5



SOLID RUBBER SR0605-2
6x1.5



SOLID RUBBER SR0605-3
6x1.5



SOLID RUBBER SR0605-4
6x1.5



SOLID RUBBER SR0606-1
6x1.5



SOLID RUBBER SR0606-2
6x1.5



SOLID RUBBER SR0606-3
6x1.5



SOLID RUBBER SR0607
6x1.5



SOLID RUBBER SR0608-1
6x1.5



SOLID RUBBER SR0608-2
6x1.5



SOLID RUBBER SR0608-3
6x1.5



SOLID RUBBER SR0608-4
6x1.5



SOLID RUBBER SR0608-5
6x1.5



SOLID RUBBER SR0609
6x1.5



SOLID RUBBER SR0610-1
6x1.5

SOLID RUBBER WHEELS

SOLID RUBBER SR0610-2
6x1.5



SOLID RUBBER SR0620-1
6x2



SOLID RUBBER SR0620-2
6x2



SOLID RUBBER SR0630 6x3



SOLID RUBBER SR0630 6x3



SOLID RUBBER SR0650-3
6.5" 164x45



SOLID RUBBER SR0653
6.5x1.75



SOLID RUBBER SR0701
7x1.2



SOLID RUBBER SR0702
7x1.2



SOLID RUBBER SR0703
7x1.5



SOLID RUBBER SR0704
7x1.75



SOLID RUBBER SR0705-1
7x1.75



SOLID RUBBER SR0705-2
7x1.75



SOLID RUBBER SR0706-1
7x1.75



SOLID RUBBER SR0706-2
7x1.75



SOLID RUBBER SR0707
7x1.5



SOLID RUBBER SR0708-1
7x1.5



SOLID RUBBER SR0708-2
7x1.5



SOLID RUBBER SR0709
7x1.5



SOLID RUBBER SR0710
7x1.5



SOLID RUBBER SR0801
8x1.1



SOLID RUBBER SR0804-1
8x1.75



SOLID RUBBER SR0804-2
8x1.75



SOLID RUBBER SR0804-3
8x1.75



SOLID RUBBER SR0804-4
8x1.75



SOLID RUBBER SR0808-1
8x1.75



SOLID RUBBER SR0808-2
8x1.75



SOLID RUBBER SR0808-3
8x1.75



SOLID RUBBER SR0809 8x2



SOLID RUBBER SR0810-1
8x2

SOLID RUBBER WHEELS



SOLID RUBBER SR0810-2
8x2



SOLID RUBBER SR0810-3
8x2



SOLID RUBBER SR0810-4
8x2



SOLID RUBBER SR0810-5
8x2



SOLID RUBBER SR0811-1
8x2.2



SOLID RUBBER SR0811-2
8x2.2



SOLID RUBBER SR0815
200/50-100



SOLID RUBBER SR0817
250/50-130



SOLID RUBBER SR0820
8x2.5



SOLID RUBBER SR0825
8x250-4



SOLID RUBBER SR1001-1
10x1.75



SOLID RUBBER SR1001-2
10x1.75



SOLID RUBBER SR1001-3
10x1.75



SOLID RUBBER SR1002
10x1.75



SOLID RUBBER SR1003
10x1.75



SOLID RUBBER SR1004-1
10x2.5



SOLID RUBBER SR1004-2
10x2.5



SOLID RUBBER SR1004-3
10x2.5



SOLID RUBBER SR1004-4
10x2.5



SOLID RUBBER SR1004-5
10x2.5



SOLID RUBBER SR1005
10x2.5



SOLID RUBBER SR1006-1
10x2.5



SOLID RUBBER SR1006-2
10x2.5



SOLID RUBBER SR1006-3
10x2.5



SOLID RUBBER SR1006-4
10x2.5



SOLID RUBBER SR1007
10x2.2



SOLID RUBBER SR1010
10x2.75



SOLID RUBBER SR1012
10x3



SOLID RUBBER SR1013
10x3



SOLID RUBBER SR1014
250x85

SOLID RUBBER WHEELS

SOLID RUBBER SR1030-1
10x350-4



SOLID RUBBER SR1030-2
10x350-4



SOLID RUBBER SR1031
10x350-4



SOLID RUBBER SR1201
12x1.75



SOLID RUBBER SR1202
12x1.75



SOLID RUBBER SR1209 12"
285x64



SOLID RUBBER SR1210 12"
300x73



SOLID RUBBER SR1220
12x2.5



SOLID RUBBER SR1250
12x350-6



SOLID RUBBER SR1301
13x3.00-8



SOLID RUBBER SR1302
13x3.00-8



SOLID RUBBER SR1404-1
14x4



SOLID RUBBER SR1404-2
14x4



SOLID RUBBER SR1404-3
14x4



SOLID RUBBER SR1404-4
14x4



SOLID RUBBER SR1405
14x4



SOLID RUBBER SR1406
14x4



SOLID RUBBER SR1407
14x4



SOLID RUBBER SR1503
15x3



SOLID RUBBER SR1602
16x4.00-8



SOLID RUBBER SR1603
16x4.00-8



SOLID RUBBER SR2001 20
inch



SOLID RUBBER SR2002
20x1.75

RUBBER CRUMB WHEELS



CRUMB WHEEL CR0601-1 8-inch



CRUMB WHEEL CR0601-1 8-inch



CRUMB WHEEL CR0601-1 8-inch



CRUMB WHEEL CR0601-1 6-inch



CRUMB WHEEL CR0601-1 6x1.5



CRUMB WHEEL CR0601-2 6x1.5



CRUMB WHEEL CR0601-3 6x1.5



CRUMB WHEEL CR0601-4 6x1.5



CRUMB WHEEL CR0602 6x1.5



CRUMB WHEEL CR0603 6x1.75



CRUMB WHEEL CR0606 6x2



CRUMB WHEEL CR0610 6x2



CRUMB WHEEL CR0611-1 6x2



CRUMB WHEEL CR0611-2 6x2



CRUMB WHEEL CR0615 6.5"



CRUMB WHEEL CR0650 6" x50



CRUMB WHEEL CR0701 7x1.5



CRUMB WHEEL CR0702 7x1.5



CRUMB WHEEL CR0703 7x1.5



CRUMB WHEEL CR0705 7x1.5



CRUMB WHEEL CR0710 7x1.75



CRUMB WHEEL CR0802-1 8x1.75



CRUMB WHEEL CR0802-2 8x1.75



CRUMB WHEEL CR0802-3 8x1.75



CRUMB WHEEL CR0802-4 8x1.75



CRUMB WHEEL CR0808 8" 203x55



CRUMB WHEEL CR0810-1 8x2



CRUMB WHEEL CR0810-2 8x2



CRUMB WHEEL CR0810-3 8x2



CRUMB WHEEL CR0811-1 8x2.2

RUBBER CRUMB WHEELS



CRUMB WHEEL CR0811-2
8x2.2



CRUMB WHEEL CR0811-3
8x2.2



CRUMB WHEEL CR0811-4
8x2.2



CRUMB WHEEL CR0813-1
8x2.2



CRUMB WHEEL CR0813-2



CRUMB WHEEL CR0814-1
8x2.5



CRUMB WHEEL CR0814-2
8x2.5



CRUMB WHEEL CR0814-3
8x2.5



CRUMB WHEEL CR0814-4



CRUMB WHEEL CR0814-5
8x2.5



CRUMB WHEEL CR0820
8x2.5-4



CRUMB WHEEL CR0821
8"x2.50-4



CRUMB WHEEL CR0830
8.5X2.5



CRUMB WHEEL CR0832 8.8"



CRUMB WHEEL CR0841
8"x200x45



CRUMB WHEEL CR0841
8"x200x45



CRUMB WHEEL CR0842
8"x200x45



CRUMB WHEEL CR0901 9x2



CRUMB WHEEL CR0910
9x2.5



CRUMB WHEEL CR1002
10x2



CRUMB WHEEL CR1003
10x2.75



CRUMB WHEEL CR1004
10x1.75



CRUMB WHEEL CR1005-1
10x2.5



CRUMB WHEEL CR1005-2
10x2.5



CRUMB WHEEL CR1005-4
10x2.5



CRUMB WHEEL CR1005-5
10x2.5



CRUMB WHEEL CR1005-6
10x2.5



CRUMB WHEEL CR1006
10x2



CRUMB WHEEL CR1020 10"
250x70



CRUMB WHEEL CR1030
10x350-4

RUBBER CRUMB WHEELS



CRUMB WHEEL CR1201
12x2



CRUMB WHEEL CR1202
12x3



CRUMB WHEEL CR1203
12x3



CRUMB WHEEL CR1204
12x3



CRUMB WHEEL CR1210
12x1.75



CRUMB WHEEL CR1301
13x3.00-7



CRUMB WHEEL CR1302-1
13X3.00-8



CRUMB WHEEL CR1302-2
13x3.00-8



CRUMB WHEEL CR1302-3
13X3.00-8



CRUMB WHEEL CR1320
13X2.5



CRUMB WHEEL CR1401-1
14x4



CRUMB WHEEL CR1401-2
14x4



CRUMB WHEEL CR1401-3
14x4



CRUMB WHEEL CR1402
14x3.50



CRUMB WHEEL CR1403
14x4



CRUMB WHEEL CR1405 14
inch



CRUMB WHEEL CR1406 14
inch



CRUMB WHEEL CR1601
16x400-8



CRUMB WHEEL CR1602
15x3

SEMI PNEUMATIC WHEELS

 CRUMB WHEEL CR0601-1
14x2

 SEMI PNEUMATIC SP0601-1
6x1.5

 SEMI PNEUMATIC SP0601-2
6x1.5

 SEMI PNEUMATIC SP0601-3
6x1.5

 SEMI PNEUMATIC SP0602-1
6x1.5

 SEMI PNEUMATIC SP0602-2
6x1.5

 SEMI PNEUMATIC SP0602-3
6x1.5

 SEMI PNEUMATIC SP0603-1
6x1.5

 SEMI PNEUMATIC SP0603-2
6x1.5

 SEMI PNEUMATIC SP0603-3
6x1.5

 SEMI PNEUMATIC SP0603-4
6x1.5

 SEMI PNEUMATIC SP0604
6x1.5

 SEMI PNEUMATIC SP0605
6x2

 SEMI PNEUMATIC SP0701
7x1.5

 SEMI PNEUMATIC SP0702
7x1.5

 SEMI PNEUMATIC SP0703
7x1.75

 SEMI PNEUMATIC SP0704
7x1.75

 SEMI PNEUMATIC SP0705
7x1.75

 SEMI PNEUMATIC SP0707
7.5x1.75

 SEMI PNEUMATIC SP0709-1
7x1.5

 SEMI PNEUMATIC SP0709-2
7x1.5

 SEMI PNEUMATIC SP0709-3
7x1.5

 SEMI PNEUMATIC SP0709-4
7x1.5

 SEMI PNEUMATIC SP0710
7x1.5

 SEMI PNEUMATIC SP0711
7x1.5

 SEMI PNEUMATIC SP0801
8x1.75

 SEMI PNEUMATIC SP0802-1
8x1.75

 SEMI PNEUMATIC SP0802-2
8x1.75

 SEMI PNEUMATIC SP0802-3
8x1.75

 SEMI PNEUMATIC SP0802-4
8x1.75

SEMI PNEUMATIC WHEELS



SEMI PNEUMATIC SP0804-1
8x1.75



SEMI PNEUMATIC SP0804-2
8x1.75



SEMI PNEUMATIC SP0805-1
8x1.75



SEMI PNEUMATIC SP0805-2
8x1.75



SEMI PNEUMATIC SP0806
8.5x1.5



SEMI PNEUMATIC SP0809
8x2.25



SEMI PNEUMATIC SP0810
8x2.25



SEMI PNEUMATIC SP0811
8x2.5



SEMI PNEUMATIC SP0812
8x2.75



SEMI PNEUMATIC SP1001-1
10x1.75



SEMI PNEUMATIC SP1001-2
10x1.75



SEMI PNEUMATIC SP1001-3
10x1.75



SEMI PNEUMATIC SP1002
10x1.75



SEMI PNEUMATIC SP1003
10x1.75



SEMI PNEUMATIC SP1004
10x1.75



SEMI PNEUMATIC SP1005
10x1.75



SEMI PNEUMATIC SP1006
10x2.5



SEMI PNEUMATIC SP1008
10x2.75



SEMI PNEUMATIC SP1009
10x2.75



SEMI PNEUMATIC SP1011
10x3.3



SEMI PNEUMATIC SP1015-1
10x2.5



SEMI PNEUMATIC SP1015-2
10x2.5



SEMI PNEUMATIC SP1015-3
10x2.5



SEMI PNEUMATIC SP1020
10x3.00-4



SEMI PNEUMATIC SP1021
10x3



SEMI PNEUMATIC SP1201
12x1.75



SEMI PNEUMATIC SP1203
12x1.75



SEMI PNEUMATIC SP1205
12x3



SEMI PNEUMATIC SP1401
14x1.75



SEMI PNEUMATIC SP1402
14x1.75

SEMI PNEUMATIC WHEELS



PNEUMATIC CAPR1006F 6x2



PNEUMATIC CAPR1006F 8x2



PNEUMATIC CAPR1006F 6x2



PNEUMATIC CAPR1006F 6x2



PNEUMATIC CAPR1006F
10x3.50-4



PNEUMATIC CAPR0601F 6x2



PNEUMATIC CAPR0601S
6x2



PNEUMATIC CAPR0602F 6x2



PNEUMATIC CAPR0602S
6x2



PNEUMATIC CAPR0803F
8x2.50-4



PNEUMATIC CAPR0803S
8x2.50-4



PNEUMATIC CAPR0804F
8x2.50-4



PNEUMATIC CAPR0804S
8x2.50-4



PNEUMATIC CAPR0833F
8x2.50-4



PNEUMATIC CAPR0833S
8x2.50-4



PNEUMATIC CAPR0834F
8x2.50-4



PNEUMATIC CAPR0834S
8x2.50-4



PNEUMATIC CAPR0803S
8x2.50-4



PNEUMATIC CAPR1101F
400-4



PNEUMATIC CAPR1201F
12x3.50-6



PNEUMATIC CAPR1201S
12x3.50-6



PNEUMATIC CAPR1202F
12x3.50-6



PNEUMATIC CAPR1202S
12x3.50-6



PNEUMATIC CAPR1203F
12x3.50-6



PNEUMATIC CAPR1203S
12x3.50-6



PNEUMATIC CAPR1301F
400-6



PNEUMATIC CAPR1301S
400-6



PU WHEEL CAPU0801F 8X2



PU WHEEL CAPU0801S 8X2



PU WHEEL CAPU0804F 250-
4

SEMI PNEUMATIC WHEELS



PU WHEEL CAPU0804S 250-4



PU WHEEL CAPU0805F 250-4



PU WHEEL CAPU0805S 250-4



PU WHEEL CAPU0807F 8X250-4



PU WHEEL CAPU0807S 8X250-4



PU WHEEL CAPU0810F 8X2.2



PU WHEEL CAPU0810S 8X2.2



PU WHEEL CAPU1001S 350-4



PU WHEEL CAPU1001F 350-4



PU WHEEL CAPU1002F 350-4



PU WHEEL CAPU1004S 350-4



PU WHEEL CAPU1004F 350-4



PU WHEEL CAPU1050 10x3(260x85)



PU WHEEL CAPU1051S 10x3(260x85)



PU WHEEL CAPU1051F 10x3(260x85)



CRUMB CACR0801 8X2



CRUMB CACR0810S 8x2.5



CRUMB CACR0810F 8X2.5



CRUMB CACR1020S 10x2.75



CRUMB CACR1020F 10X2.75



FOAM FILLED CAFF1203S 350-6



FOAM FILLED CAFF1203F 350-6



FOAM FILLED CAFF1202S 350-6



FOAM FILLED CAFF1202S 350-6



FOAM FILLED CAFF1202F 350-6



FOAM FILLED CAFF1004SL 10X350-4



FOAM FILLED CAFF1004S 10X350-4



FOAM FILLED CAFF1004F 10X350-4



FOAM FILLED CAFF1003S 10X350-4



FOAM FILLED CAFF1003F 10X350-4

WHEEL BARROW



WHEELBARROW WB6400A
FOR AGRICULTURAL USE



WHEELBARROW WB6400C
FOR AGRICULTURAL USE



WHEELBARROW WB6400B
FOR AGRICULTURAL USE



WHEELBARROW WB6409P



WHEELBARROW WB6408P



WHEELBARROW WB6404SP



WHEELBARROW
WB6404SPU



WHEELBARROW WB6404F



WHEELBARROW WB6404P



WHEELBARROW WB6404S



WHEELBARROW WB6404



WHEELBARROW WB6414H



WHEELBARROW WB6414G



WHEELBARROW WB6414F



WHEELBARROW WB6414E



WHEELBARROW WB6414D



WHEELBARROW WB6414C



WHEELBARROW WB6414B



WHEELBARROW WB6414A



WHEELBARROW WB6400E



WHEELBARROW WB6400F



WHEELBARROW WB6400G



WHEELBARROW WB6401



WHEELBARROW WB6205C



WHEELBARROW WB6215P



WHEELBARROW WB5009S



WHEELBARROW WB6203T



WHEELBARROW WB6214C



WHEELBARROW WB6215



WHEELBARROW WB6213

7

SERIES

SPECIAL CASTERS

 **MIYAMETALS**

WHEEL BARROW



WHEELBARROW WB6214B



WHEELBARROW WB6214A



WHEELBARROW WB5010



WHEELBARROW WB5009



WHEELBARROW WB6205B



WHEELBARROW WB6205A



WHEELBARROW WB6203S



WHEELBARROW WB6203



WHEELBARROW WB6204S



WHEELBARROW WB6204



WHEELBARROW WB4204B



WHEELBARROW WB4204A



WHEELBARROW WB6684



WHEELBARROW WB6683



WHEELBARROW WB6682



WHEELBARROW WB6681



WHEELBARROW WB6680



WHEELBARROW WB6720



WHEELBARROW WB8440P



WHEELBARROW WB8430P



WHEELBARROW WB8430



WHEELBARROW WB8400



WHEELBARROW WB6700



WHEELBARROW WB6600



WHEELBARROW WB6400A



WHEELBARROW WB7900



WHEELBARROW WB7880



WHEELBARROW WB7843



WHEELBARROW WB7842



WHEELBARROW WB7841

HAND TRUCK



Folding 2-in-1 Hand Truck
HT1020



2-in-1 Hand Truck HT1025



Heavy Duty Hand Truck
HT1084



Stair Climber Truck HT1060



Hand Truck HT1005



Heavy Duty Hand Truck
HT1100



Stair Climber Truck HT1105



Heavy Duty Hand Truck
HT1130



Heavy Duty Hand Truck
HT1140



Heavy Duty Hand Truck
HT1087



Heavy Duty Hand Truck
HT1830



Light Duty Hand Truck HT1131



Light Duty Hand Truck HT1132



Heavy Duty Hand Truck
HT1825



Steel Drum Truck HT1601



Cylinder Hand Truck HT1610



Cylinder Hand Truck HT1612



2-in-1 Cylinder Hand Truck
HT1613



Cylinder Hand Truck HT1614



Cylinder Hand Truck HT1615



Aluminum Heavy Duty Hand
Truck HT2020



Aluminum Heavy Duty Hand
Truck HT2022



Aluminum Heavy Duty Hand
Truck HT2025



Aluminum Heavy Duty Hand
Truck HT2026



Aluminum Heavy Duty Hand
Truck HT2023A



Aluminum Heavy Duty Hand
Truck HT2024A



Aluminum Heavy Duty Hand
Truck HT2024B



Aluminum Hand Truck
HT2023B



Aluminum Hand Truck
HT2023C



Aluminum Hand Truck
HT2023D



Aluminum Heavy Duty Hand
Truck HT2050



Aluminium Heavy Duty Hand
Truck HT2051



Aluminium Heavy Duty Hand
Truck HT2052



Aluminium 2 in 1 Convertible
Hand Truck HT2100



Aluminium 2 in 1 Convertible
Hand Truck HT2101

PLATFORM HAND TRUCK



Platform Hand Truck PH300A



Platform Hand Truck PH150A



Platform Hand Truck PH300



Platform Hand Truck PH150

GARDEN CAR



Steel kids wheelbarrow
WB2603



Poly kids wheelbarrow
WB2602



Poly kids wheelbarrow
WB2601



Garden Cart TC1032



Garden Cart TC1031



Garden Cart TC1030, 360
Degree Swivel Seat



Folding Wheelbarrow WB1020



Folding Wheelbarrow WB1010



Big Size Folding Wheelbarrow
WB1021



Children Kids Toys Cart
TC1020, 200lbs



Wooden Garden Cart
TC4020, 200lbs



Garden Cart With Wooden
Sides TC4021, 300lbs



Heavy Duty Plastic Wagon
TC1880, 400lbs



Garden Kneeler and Seat with
Tool Pouches

WIRE GARDEN CAR



Heavy Duty Steel 2-Deck Wagon TC1855,550lbs



Heavy Duty Steel Wagon TC1860,300lbs



Heavy Duty Steel Wagon TC1875,750lbs



Heavy Duty Steel Wagon TC1851,1000lbs



Long Heavy Duty Steel Wagon TC1850,800lbs



Heavy Duty Steel Wagon TC1842,400lbs



Heavy Duty Steel Wagon TC1840,400lbs



Heavy Duty Steel Wagon TC1230,660lbs



Heavy Duty Steel Wagon TC1240,1200lbs



Heavy Duty Steel Wagon TC1210,1400lbs



Heavy Duty Steel Wagon TC1814,1400lbs

WIRE GARDEN CAR



Collapsible Folding Outdoor Cart TC1310



Collapsible Folding Outdoor Cart TC1320



Collapsible Folding Cart TC1050



Collapsible Folding Cart TC1040








Collapsible Folding Outdoor Cart TC1300

7 SERIES

SPECIAL CASTERS



GD-S series

Model No.	Wheel Material					
		Wheel Dia.	Tread Width	Total Height	Thread Size	Load Capacity
		(mm)	(mm)	(mm)	(mm)	(kg)
MY7-GD-40S	Nylon	42	20	71	M8X10	50
MY7-GD-60S	Nylon	50	25	82	M12X15	250
MY7-GD-80S	Nylon	63	30	103	M12X15	500
MY7-GD-100S	Nylon	75	30	120	M16X20	750
MY7-GD-120S	Nylon	75	30	120	M16X20	1000

Heavy Duty Shock Absorbing Casters (300~450kg)










Fixed



Swivel



Swivel Brake

Model No.			Wheel Material							
				Wheel Dia.	Tread Width	Total Height	Plate Size	Hole Spacing	Hole Size	Load Capacity
Fixed	Swivel	Swivel Brake		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
MY7-C5-50R64SZU-03	MY7-C5-50S64SZU-03	MY7-C5-50T64SZU-03	Pu Cast iron	125	50	210	136X110X6	84-112X72-98	14	300
MY7-C6-50R64SZU-03	MY7-C6-50S64SZU-03	MY7-C6-50T64SZU-03	Pu Cast iron	150	50	222	136X110X6	84-112X72-98	14	350
MY7-C8-50R64SZU-03	MY7-C8-50S64SZU-03	MY7-C8-50T64SZU-03	Pu Cast iron	200	50	265	136X110X6	84-112X72-98	14	450

Heavy Duty Floor Locks (250kg-300kg)



Japan Type Floor Locks

Model No.	Size	Extended height	Retracted height	Top plate size	Hole spacing	Load Capacity
	(inch)	(mm)	(mm)	(mm)	(mm)	(kg)
MY8-C4-FLJ	4	150	135	120X120	85X85 100X100	250~300
MY8-C5-FLJ	5	180	150	120X120	85X85 100X100	250~300
MY8-C6-FLJ	6	210	170	120X120	85X85 100X100	250~300
MY8-C8-FLJ	8	259	217	120X120	85X85 100X100	250~300



Japan Type Floor Locks

Model No.	Size	Extended height	Retracted height	Top plate size	Hole spacing	Load Capacity
	(inch)	(mm)	(mm)	(mm)	(mm)	(kg)
MY8-C4-FLJ-S	4	150	110	120X120	92X92	250~300
MY8-C5-FLJ-S	5	182	141	120X120	92X92	250~300
MY8-C6-FLJ-S	6	212	172	120X120	92X92	250~300
MY8-C8-FLJ-S	8	245	215	120X120	92X92	250~300

Heavy Duty Floor Locks (150~250kg)



Japan Type Floor Locks


Model No.	Size	Extended height	Retracted height	Top plate size	Hole spacing	Load Capacity
	(inch)	(mm)	(mm)	(mm)	(mm)	(kg)
MY8-C4-FU-2	4	151	121	120X120	95X95	250~300
MY8-C5-FU-2	5	172	146	120X120	95X95	250~300
MY8-C6-FU-2	6	198	158	120X120	95X95	250~300
MY8-C8-FU-2	8	248	208	120X120	95X95	250~300



American Type Floor Locks

Model No.	Size	Extended height	Retracted height	Top plate size	Hole spacing	Load Capacity
	(inch)	(mm)	(mm)	(mm)	(mm)	(kg)
MY8-C4-FLA	4	148	120	114X102	83X70	250~300
MY8-C5-FLA	5	173	145	114X102	83X70	250~300
MY8-C6-FLA	6	200	170	114X102	83X70	250~300
MY8-C8-FLA	8	246	220	114X102	83X70	250~300

Leveling Feet (60~6000kg)



Swivel Leveling Feet(without positioning hole)

Model No.	Stem Dia.	Stem Length	Hex Dia.	Ball Dia.	Base Height	Base Dia.	Static Load Capacity
	M	L	Hex	Q	H	D	KG
D=40mm							
MUF-M8-L-40	M8	30/50/100	14	13.5	17	40	350
MUF-M10-L-40	M10	30/50/100					
MUF-M12-L-40	M12	30/50/100/150					
MUF-M14-L-40	M14	50/100/150					
D=50mm							
MUF-M8-L-50	M8	30/50/100	14	13.5	20	50	350
MUF-M10-L-50	M10	30/50/100					
MUF-M12-L-50	M12	30/50/100/150					
MUF-M14-L-50	M14	50/100/150					
MUF-M16-L-50	M16	50/100/150	17	15.3			500
D=60mm							
MUF-M8-L-60	M8	30/50/100	14	13.5	25	60	500
MUF-M10-L-60	M10	30/50/100					
MUF-M12-L-60	M12	30/50/100/150					
MUF-M14-L-60	M14	50/100/150					
MUF-M16-L-60	M16	50/100/150	17	15.3			700
MUF-M16-L-60	M16	50/100/150	22	21.5			
MUF-M18-L-60	M18	50/100/150					
MUF-M20-L-60	M20	50/100/150					
D=100mm							
MUF-M16-L-100	M16	50/100/150	22	21.5	30	100	1200
MUF-M18-L-100	M18	50/100/150					
MUF-M20-L-100	M20	50/100/150					
MUF-M22-L-100	M22	50/100/150					
MUF-M24-L-100	M24	50/100/150	24				
D=80mm							
MUF-M10-L-80	M10	50/100/150	17	15.3	24	80	600
MUF-M12-L-80	M12	50/100/150					
MUF-M14-L-80	M14	50/100/150					
MUF-M16-L-80	M16	50/100/150					
MUF-M16-L-80	M16	50/100/150	22	21.5			900
MUF-M18-L-80	M18	50/100/150					
MUF-M20-L-80	M20	50/100/150					
MUF-M24-L-80	M24	50/100/150					



Swivel Leveling Feet(with positioning hole)

Model No.	Stem Dia.	Stem Length	Hex Dia.	Ball Dia.	Base Height	Base Dia.	Static Load Capacity
	M	L	Hex	Q	H	D	KG
D=80mm							
MUF-M8-L-80Z	M8	30/50/100	14	13.5	20	80	500
MUF-M10-L-80Z	M10	30/50/100					
MUF-M12-L-80Z	M12	50/100/150					
MUF-M14-L-80Z	M14	50/100/150					
MUF-M16-L-80Z	M16	50/100/150	17	15.3			600
MUF-M18-L-80Z	M18	50/100/150	19				
MUF-M20-L-80Z	M20	50/100/150					
D=100mm							
MUF-M12-L-100Z	M12	50/100/150	17	15.3	29	100	600
MUF-M14-L-100Z	M14	50/100/150					
MUF-M16-L-100Z	M16	50/100/150					
MUF-M16-L-100Z	M16	50/100/150	22	21.5			1000
MUF-M18-L-100Z	M18	50/100/150					
MUF-M20-L-100Z	M20	50/100/150					
MUF-M22-L-100Z	M22	50/100/150					
MUF-M24-L-100Z	M24	50/100/150	22				1200
D=110mm							
MUF-M16-L-110Z	M16	50/100/150	22	21.5	30	110	1200
MUF-M20-L-110Z	M20	50/100/150	24				1200
MUF-M24-L-110Z	M24	50/100/150	36				1200
D=140mm							
MUF-M36-L-140Z	M36	50/100/150	24	21.5	48	140	1200
MUF-M24-L-140Z	M24	100/150/200	36	35	54	140	1300



Fixed Leveling Feet(without positioning hole)

Model No.	Stem Dia.	Stem Length	Hex Dia.	Base Height	Base Dia.	Static Load Capacity
	M	L	Hex	H	D	KG
D=50mm						
MVF-M8-L-50	M8	30/50/100	14	20	50	400
MUF-M10-L-50	M10	30/50/100				
MUF-M12-L-50	M12	30/50/100/150				
MUF-M14-L-50	M14	30/50/100/150				
D=60mm						
MVF-M8-L-60	M8	30/50/100	14	24	60	500
MVF-M10-L-60	M10	30/50/100				
MVF-M12-L-60	M12	30/50/100/150				
MVF-M14-L-60	M14	50/100/150				
MVF-M16-L-60	M16	50/100/150	17			600
D=80mm						
MVF-M14-L-80	M14	50/100/150	19	28	80	700
MVF-M16-L-80	M16	50/100/150	22			
MVF-M18-L-80	M18	50/100/150				
MVF-M20-L-80	M20	50/100/150				
MVF-M24-L-80	M24	50/100/150	24			900

8

SERIES

OTHER ACCESSORIES



Fixed Leveling Feet(without positioning hole)

Model No.	Stem Dia.	Stem Length	Base Height	Base Dia.	Static Load Capacity
	M	L	H	D	KG
D=30mm					
MVF-M6-L-30	M6	30/40/50/60/70/80	10	30	150
MVF-M8-L-30	M8	30/40/50/60/70/80			
MVF-M10-L-30	M10	30/40/50/60/70/80			
D=38mm					
MF-M6-L-38	M6	20/30/40/50/60/70/80	12	38	200
MF-M8-L-38	M8	20/30/40/50/60/70/80			
MF-M10-L-38	M10	20/30/40/50/60/70/80			
MF-M12-L-38	M12	20/30/40/50/60/70/80			



Fixed Leveling Feet

Model No.	Base Dia.	Base Height	Stem Dia.	Stem Length	Static Load Capacity
	D	H	M	L	KG
DF-M630-30	30	10	M6	20	150
DF-M850-30				30	
DF-M850-40	40	10	M8	40	250
DF-M1050-40				50	
DF-M1060-50	50	11	M12	60	400
DF-M1270-50				70	
DF-M1480-50				80	
DF-M16100-50				100	



Fixed Leveling Feet(with positioning hole)

Model No.	Stem Dia.	Stem Length	Hex Dia.	Hase Height	Base Dia.	Hole Spacing	Static Load Capacity
	M	L	Hex	H	D	Z	KG
D=100mm							
MVF-M14-L-100	M8	50/100/150	19	33	100	71	700
MUF-M16-L-100	M16	50/100/150	22				1000
MUF-M18-L-100	M18	50/100/150					
MUF-M20-L-100	M20	50/100/150					
MUF-M22-L-100	M22	50/100/150					
MUF-M24-L-100	M24	50/100/150	24				1200



Injection Furniture Leveling Feet

Model No.	Stem Dia.	Stem Length	Base Height	Base Dia.	Static Load Capacity
	M	L	H	D	KG
MJF-M6-L-10	M6	10	9	25	100
MJF-M8-L-10	M8	10	9	25	100
MJF-M10-L-10	M10	10月20日	9	25	150
MJF-M8-L-7	M8	7	11	30	200
MJF-M8-L-8	M8	8	10	30	150



Fixed Leveling Feet(with positioning hole)

Model No.	Stem Dia.	Stem Length	Hex Dia.	Base Height	Base Dia.	Hole Spacing	Static Load Capacity
	M	L	Hex	H	D	Z	KG
D=100mm							
MVF-M14-L-100	M8	50/100/150	19	33	100	71	700
MUF-M16-L-100	M16	50/100/150	22				1000
MUF-M18-L-100	M18	50/100/150					
MUF-M20-L-100	M20	50/100/150					
MUF-M22-L-100	M22	50/100/150					
MUF-M24-L-100	M24	50/100/150	24				1200



Internal thread Swivel Leveling Feet

Model No.	Internal thread Dia.	thread depth	Base Height	Base Dia.
	M	Q	H	D
MNUF-M12-60	M12	20	23	60
MNUF-M16-60	M16	25		
MNUF-M16-80	M16	25	26	80
MNUF-M18-80	M18			
MNUF-M18-100	M18	27	26	100
MNUF-M20-100	M20			




Stainless Steel Swivel Leveling Feet

Model No.	Stem Dia.	Stem Length	Hex Dia.	Ball Dia.	Base Height	Base Dia.	Static Load Capacity
	M	L	Hex	Q	H	D	KG
MSUL-M-L-50	M10/12/14	50/100	14	13.5	20	50	500
MSUL-M-L-60	M12/14	50/100/150				60	600
MSUL-M-L-60	M12/14/16	50/100/150	17	15.3		80	800
MSUL-M-L-80	M12/14/16	50/100/150					
MSUL-M-L-80	M16/18/20/24	50/100/150	22	21.5	21	80	1200
MSUL-M-L-80	M16/20/24	50/100/150	22	21.5		1500	
MSUL-M-L-100	M16/20/24	50/100/150	24	21.5		21	100

8

SERIES

OTHER ACCESSORIES

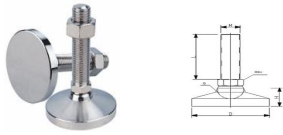

Carbon Steel Swivel Leveling Feet

Model No.	Stem Dia.	Stem Length	Hex Dia.	Ball Dia.	Base Height	Base Dia.	Static Load Capacity
	M	L	Hex	Q	H	D	KG
D=50mm							
MCUF-M8-L-50	M8	50/100/150	14	13.5	21	50	400
MCUF-M10-L-80	M10	50/100/150					500
MCUF-M12-L-80	M12	50/100/150					600
MCUF-M14-L-80	M14	50/100/150	800				
MCUF-M16-L-80	M16	50/100/150	17	15.3			1000
D=60mm							
MCUF-M12-L-60	M12	50/100/150	17	15.3	24	60	600
MCUF-M14-L-60	M14	50/100/150					800
MCUF-M16-L-60	M16	50/100/150	22	21.5			1000
MCUF-M20-L-60	M20	50/100/150					1200
MCUF-M24-L-60	M24	50/100/150	24	21.5			1400
D=80mm							
MCUF-M16-L-80	M16	50/100/120/150	22	21.5	28	80	1200
MCUF-M18-L-80	M18	50/100/120/150					1500
MCUF-M20-L-80	M20	50/100/120/150					1800
MCUF-M24-L-80	M24	50/100/120/150					24
D=100mm							
MCUF-M16-L-100	M16	50/100/150	22	21.5	30	100	1500
MCUF-M18-L-100	M18	50/100/150					1800
MCUF-M20-L-100	M20	50/100/150					2000
MCUF-M24-L-100	M24	50/100/150					24
MCUF-M30-L-100	M30	50/100/150	30	26			4000
D=120mm							
MCUF-M16-L-120	M16	50/100/150	22	21.5	28	120	1500
MCUF-M18-L-120	M18	50/100/150					2000
MCUF-M20-L-120	M20	50/100/150					2200
MCUF-M24-L-120	M24	50/100/150					24
MCUF-M30-L-120	M30	50/100/150	30	26			4500



Carbon Steel Fixed Leveling Feet

Model No.	Stem Dia.	Stem Length	Hex Dia.	Base Height	Base Dia.	Static Load Capacity
	M	L	Hex	H	D	KG
D=40mm						
MCVF-M8-L-40	M8	30/50/100	14	20	40	400
MCVF-M10-L-40	M10	50/100/150				500
MCVF-M12-L-40	M12	50/100/150				600
MCVF-M14-L-40	M14	50/100/150	17			800
MCVF-M16-L-40	M16	50/100/150				1000
D=50mm						
MCVF-M8-L-50	M8	30/50/100	14	20	50	400
MCVF-M10-L-50	M10	50/100/150				500
MCVF-M12-L-50	M12	50/100/150				600
MCVF-M14-L-50	M14	50/100/150	17			800
MCVF-M16-L-50	M16	50/100/150				1000
D=60mm						
MCVF-M12-L-60	M12	50/100/150	17	24	60	600
MCVF-M14-L-60	M14	50/100/150				800
MCVF-M16-L-60	M16	50/100/150				1000
MCVF-M20-L-60	M20	50/100/150				21
D=80mm(positioning hole can be customized)						
MCVF-M16-L-80	M16	50/100/150	19	24	80	1200
MCVF-M18-L-80	M18	50/100/150	21			1500
MCVF-M20-L-80	M20	50/100/150				1800
MCVF-M24-L-80	M24	50/100/150	24			2200


D=100mm(positioning hole can be customized)						
MCVF-M16-L-100	M16	50/100/150	19	24	100	1500
MCVF-M18-L-100	M18	50/100/150	21			1800
MCVF-M20-L-100	M20	50/100/150				2000
MCVF-M24-L-100	M24	50/100/150/200	24			2500
MCVF-M30-L-100	M30	50/100/150/200	30			4000
D=120mm(positioning hole can be customized)						
MCVF-M16-L-120	M16	50/100/150	19	24	120	1500
MCVF-M18-L-120	M18	50/100/150	21			2000
MCVF-M20-L-120	M20	50/100/150				2200
MCVF-M24-L-120	M24	50/100/150/200	24			2800
MCVF-M30-L-120	M30	50/100/150/200	30			4500



Stainless Steel Swivel Leveling Feet

Model No.	Stem Dia.	Stem Length	Hex Dia.	Ball Dia.	Base Height	Base Dia.	Static Load Capacity
	M	L	Hex	Q	H	D	KG
D=50mm							
MSUF-M-L-50	M8/10/112	30/50/100/150	14	13.5	21	50	700
MSUF-M-L-50	M14/16	50/100/150	17	15.3			800
D=60mm							
MSUF-M-L-60	M12/14	50/100/150	17	15.3	24	60	900
MSUF-M-L-60	M16/20	50/100/150/200	22	21.5			1000
MSUF-M-L-60	M24	50/100/150	24				1400
D=80mm							
MSUF-M-L-80	M16/18/20	50/100/120/150	22	21.5	24	80	1500
MSUF-M-L-80	M24	50/100/120/150	24				2200
MSUF-M-L-80	M30	50/100/120/150	30				2400

D=100mm								
MSUF-M-L-100	M16/18/20	50/100/150/200	22	21.5	24	100	1500	
MCUF-M-L-100	M24	50/100/150/200	24	21.5			2500	
MCUF-M-L-100	M30	50/100/150/200	30	29			26	4000
MCUF-M-L-100	M36	50/100/150/200	36	30			30	6000
D=120mm								
MSUF-M-L-120	M20/24	50/100/150/200	24	21.5	24	120	2500	
MCUF-M-L-120	M30	50/100/150/200	30	23.5			2800	
MCUF-M-L-120	M36	50/100/150/200	36				30	4500
D=150mm								
MSUF-M-L-150	M20/24	50/100/150/200	24	21.5	30	150	3000	
MCUF-M-L-150	M30	50/100/150/200	30				3500	
MCUF-M-L-150	M36	50/100/150/200	36				4000	

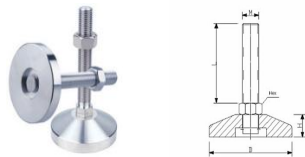

Stainless Steel Fixed Leveling Feet

Model No.	Stem Dia.	Stem Length	Hex Dia.	Base Height	Base Dia.	Static Load Capacity
	M	L	Hex	H	D	KG
D=50mm						
MSVF-M-L-50	M10/12/14	50/100/150/200	14	20	50	800
MSVF-M-L-50	M16/18	50/100/150/200	19			900
D=60mm						
MSVF-M-L-60	M10/12/14	50/100/150/200	14	24	60	1000
MSVF-M-L-60	M16/18	50/100/150/200	19			1200
MSVF-M-L-60	M20	50/100/150/200	21			1200

8

SERIES

OTHER ACCESSORIES

D=80mm						
MSVF-M-L-80	M16/18	50/100/150/200	19	24	80	1500
MSVF-M-L-80	M20	50/100/150/200	21			1800
MSVF-M-L-80	M24/30	50/100/150/200	24/30			1800-2000
D=100mm						
MSVF-M-L-100	M16/18	50/100/150/200	19	24	80	2000
MSVF-M-L-100	M20	50/100/150/200	21			2200
MSVF-M-L-100	M24/30	50/100/150/200	24/30			2800
D=120mm						
MSVF-M-L-120	M16/18	50/100/150/200	19	24	120	1500
MSVF-M-L-120	M20	50/100/150/200	21			2000
MSVF-M-L-120	M24	50/100/150/200	24			2500
MSVF-M-L-120	M30	50/100/150/200	30			3000
D=150mm						
MSVF-M-L-150	M16/18	50/100/150/200	19	26	150	1500
MSVF-M-L-150	M20	50/100/150/200	21			2000
MSVF-M-L-150	M24	50/100/150/200	24			2500
MSVF-M-L-150	M30	50/100/150/200	30			3000



Heavy Duty Anti-vibration Fixed Leveling Feet

Model No.	Stem Dia.	Stem Length	Hex Dia.	Base Height	Base Dia.	Static Load Capacity
	M	L	Hex	H	D	KG
D=60mm						
MJVF-M16-L-60	M16	100/150	22	28	60	900
MJVF-M20-L-60	M20	100/150	24	28	60	1000
D=80mm						
MJVF-M16-L-80	M16	100/150	22	30	80	1100
MJVF-M20-L-80	M20	100/150	24	30	80	1600
D=100mm						
MJVF-M16-L-100	M16	100/150	22	34	100	1400
MJVF-M20-L-100	M20	100/150	24	34	100	2000
D=120mm						
MJVF-M16-L-100	M16	100/150	22	32	120	1500
MJVF-M20-L-100	M20	100/150	24	32	120	2100
MJVF-M30-L-100	M30	150	40	32	120	4200



Heavy Machine Suspension Fixed Leveling Feet

Model No.	Stem Dia.	Stem Length	Hex Dia.	Base Height	Base Dia.	Static Load Capacity	Rubber base thickness
	M	L	Hex	H	D	KG	
MBVF	M20/24/34	105	24-30	45	170	2000	25mm



Nylon Base Injection Fixed Leveling Feet

Model No.	Base Dia.	Base Height	Hex Dia.	Stem Dia.	Stem Length
	D	H	Hex	M	L
MPF-M1050-50	50	16	22	M10	50
MPF-M1255-50				M12	55



Rubber Pad Fixed Leveling Feet

Model No.	Stem Dia.	Stem Length	Base Height	Base Dia.	Base cover thickness	Static Load Capacity
	M	L	H	D	T	KG
MSF-M-L-40	M6/8/10/12/14	30/50/70/80/100	16	40	2	350
MSF-M-L-50	M8/10/12/14/16	30/50/80/100/120	18	50	2	400
MSF-M-L-60	M10/12/14/16/18/20	50/70/80/100/120/150	20	60	2	550
MSF-M-L-70	M12/14/16/18/20/22/24	50/70/80/100/120/150	20	70	2	700
MSF-M-L-80	M12/14/16/18/20/24	50/70/80/100/120/140/150/180	23	80	2.5	900
MSF-M-L-100	M12/14/16/18/20/24/30	50/70/80/100/120/140/150/180/200	25	100	2.5	1300



Cup Type Base Fixed Leveling Feet

Model No.	Stem Dia.	Stem Length	Base Height	Base Dia.	Base cover thickness	Static Load Capacity
	M	L	H	D	T	KG
MCF-M-L-40	M6/8/10/12/14	30/50/70/80/100	10	40	2	350
MCF-M-L-50	M8/10/12/14/16	30/50/80/100/120	11	50	2	400
MCF-M-L-55	M8/10/12/14/16	30/50/80/100/120	10	55	2	450
MCF-M-L-60	M10/12/14/16/18/20	50/70/80/100/120/150	14	60	2	500
MCF-M-L-74	M10/12/14/16/18/20	50/100/150	16	74	2.5	700
MCF-M-L80	M12/14/16/18/20/24	50/70/80/100/120/140/150/180	16	80	2	700
MCF-M-L-100	M12/14/16/18/20/24/30	50/70/80/100/120/140/150/180/200	19	100	3	900



White Nylon PP Pad Furniture Fixed Leveling Feet

Model No.	Base Dia.	Base Height	Available Stem Dia.		Stem Length
	D	H	Metric/M	Inch	L
MLF-M620-25	25	10	M6/8/10/12/14	2001/4/20	20
MLF-M825-25					25
MLF-M1030-25					30
MLF-M1030-28	28	10	M6/8/10/12/14/16	2003/8/16	30
MLF-M825-35	35	12	M6/8/10/12/14/16	2001/2/13	25
MLF-M1035-35					35
MLF-M1045-35					45
MLF-M1025-42	42	14	M6/8/10/12/14/16	2005/8/11	25
MLF-M1045-42					45



T8 Shopping Carts

Product model	MY8-T8
Product Size:	31.5*52*105cm
Basket Size:	31.5*30*40cm
Folding Size:	38*23*105cm
Loading Capacity:	20~30kg
Product dimensions:	88*33*14cm
Product N.W / G.W:	3.4kg / 4.1kg
Material:	Aluminum
Carton Meas:	87*33*53cm
Packing number:	7 PCS
N.W/ G.W:	24.5kg / 26.5kg



T6 Shopping Carts

Product model	MY8-T6
Product Size:	31.5*52*105cm
Basket Size:	31.5*30*40cm
Folding Size:	38*23*105cm
Loading Capacity:	20~30kg
Product dimensions:	88*33*14cm
Product N.W / G.W:	2.9kg / 3.6kg
Material:	Aluminum
Carton Meas:	87*33*53cm
Packing number:	7 PCS
N.W/ G.W:	21kg / 23kg



XF8 Shopping Carts

Product model	MY8-XF8
Product Size:	31.5*52*92cm
Basket Size:	31.5*30*40cm
Folding Size:	38*23*92cm
Loading Capacity:	20~30kg
Product dimensions:	88*33*14cm
Product N.W / G.W:	3.4kg / 4.0kg
Material:	Aluminum
Carton Meas:	87*33*53cm
Packing number:	7 PCS
N.W/ G.W:	24kg / 26kg



XF6 Shopping Carts

Product model	MY8-XF6
Product Size:	31.5*52*92cm
Basket Size:	31.5*30*40cm
Folding Size:	38*23*92cm
Loading Capacity:	20~30kg
Product dimensions:	88*33*14cm
Product N.W / G.W:	2.8kg / 3.5kg
Material:	Aluminum
Carton Meas:	87*33*53cm
Packing number:	7 PCS
N.W/ G.W:	20kg / 22kg



Guangzhou MIYA Metal Products Co.,Ltd.

Add. : A028, 3rd Floor, No. 1165-1185 (odd number), Xihuan Road,
Shiqiao Street, Panyu District, Guangzhou City.

Contact(Whatsapp/Wechat) : +86 186 6482 2751

Email : meguel.zheung@mymetalproduct.com sales@mymetalproduct.com

www.mymetalproduct.com

Your Trusted 365 Days Wheels and Casters Partner